
צמוד קיר אפור UP&DOWN LEDVANCE 12W IP54 אור חם




סדרת גופי תאורה קיריים מבית LEDVANCE OSRAM העולמית. הגופים מיוצרים מחומרים איכותיים בדרגת אטימות גבוהה IP54. מהווים תחליף חסכוני במיוחד בהוצאות חשמל ותחזוקה בהשוואה לגופי תאורה מסורתיים. התקנה בקלות ובנוחות. להארת היקפי מבנה, משטחים אנכיים, חזיתות מבנים, עמודים, חומות, מרפסות ועוד.

מק"ט - 10589401
דגם - 4058075075054
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP54 | IK06 | מתאים לדרישות התקן הישראלי

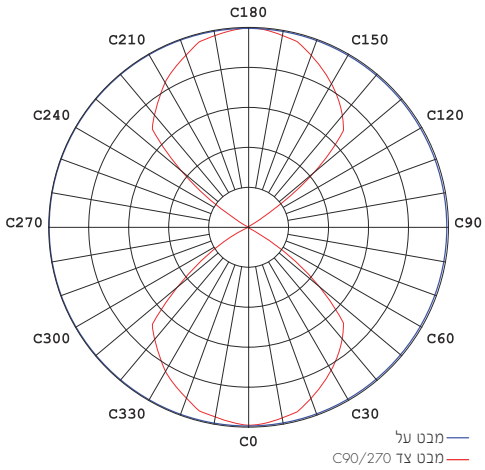



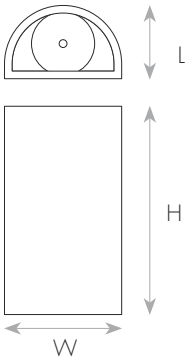

DIMENSIONS & WEIGHT	מידות ומשקל
Width	55mm
Length	90mm
Height	160mm
Product weight	480g

MATERIALS & COLORS	מבנה וגימור
Product color	dark gray
Body material	aluminum
Protection class IEC 62262	IK06
Cover finishing	Clear
Cover material	glass

NISKO

LEDVANCE

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	12W
Nominal current	0.1A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	260mA
Power factor	>0.50
Max. no. of lum. On circuit break. B16 A	75
Max. no. of lum. On circuit break. C10 A	96
Max. no. of lum. On circuit break. C16 A	60
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP54
Protection class IK 62262 (shock resistance)	IK06
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP54
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	58Lm/W
Luminous flux	700Lm
CCT	3000K
CRI	>80
LED manufacturer	CREE
Chip type	COB
Beam angle	280°
CIE class	General-Diffuse
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ