צמוד תקרה זהב ORA 36W 40CM 3CCT



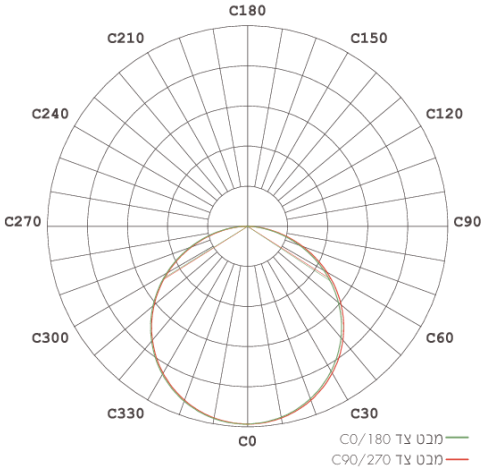

צמוד תקרה מוזהב בעל יעילות אורית גבוהה 100Lm/W, שטף אורי מרשים וגוון אור משתנה לבחירה. התקנה קלה ופשוטה. מתאים לשימוש בבתים, חדרי מדרגות, לובי, משרדים ועוד.

מק"ט - 17700037

דגם - YT-CL42-36 G

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20 IP44
- CLASS2
- אייקון של 240-220 וולט 60-50 הרץ
- מוצר בדרגת VALUE
- שנתיים אחריות

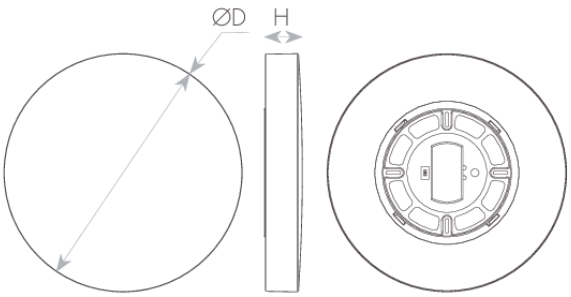



DIMENSIONS & WEIGHT

Height	45mm
Diameter	400mm
Product weight	810g

MATERIALS & COLORS

Cable surface [mm2]	gold
Protection class IEC 62262	Polypropylene
Cover material	milky
Lens material	PS

ELECTRICAL DATA

Nominal wattage	36W
Nominal current	0.16A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	80mA
Power factor	>0.95
THDi	<14%
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
TM21	√ Ta=25°C
LM79	✓
IP 60529	IP20/IP44
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-10...+45°C

PERFORMANCE

Lifespan (Hr)	25000Hrs
TM21	√ Ta=25°C
Lifespan L70	>54000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>45000Hrs

PHOTOMETRIC DATA

Luminous efficacy	100Lm/W
Luminous flux	3600Lm
CCT	3000/4000/6000K
CRI	>84
LED manufacturer	PUSISAT
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >