צמוד תקרה שחור TIMEUP 40W 54CM IP54 3CCT



סדרת גופי תאורת לד צמודי תקרה IP54. יעילות אורית גבוהה 100Lm/W. שלוש אפשרויות שינוי גוון אור. דרייבר איכותי ללא ריצוד, בסיס PC וכיסוי פרוסט מונע סנוור. הארה עליונה ותחתונה. התקנה קלה ונוחה על הטיח ע"י סיבוב. להארה בחדרי מגורים, מלתחות משרדים, שטחים מסחריים, מבואות, תאורה כללית ועוד.

מק"ט - 17700047
דגם - EW-E03040a CCT BL
קישור לדף מוצר ואביזרים נלווים באתר

2 YEAR GUARANTEE | 220-240V 50-60Hz | IP54 | מתאים לדרישות התקן הישראלי

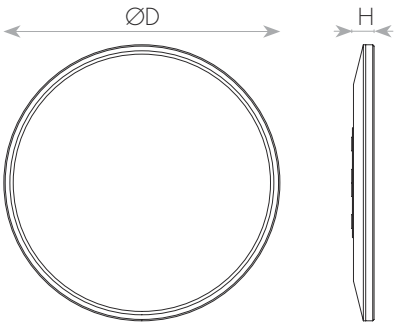



DIMENSIONS & WEIGHT	מידות ומשקל
Height	30mm
Diameter	540mm
Product weight	2000g

MATERIALS & COLORS	מבנה וגימור
Product color	black
Body material	PC
Cover finishing	milky
Cover material	PP
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	40W
Nominal current	0.17A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	ECO 2 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP54
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling Wall
Type of protection	IP54
Ambient temperature range	-10...+43°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	100Lm/W
Luminous flux	4000Lm
CCT	3000/4000/6500K
CRI	>81
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ