
צמוד תקרה שחור TIME 64W 800MM IP40 12CCT




סדרת צמודי תקרה בעיצוב דק וביעילות אורית גבוהה במיוחד 135Lm/W. כולל שלט לשינוי גוון אור, עמעום ודרייבר איכותי ללא ריצוד. כיסוי פרוסט מונע סנוור. התקנה קלה ונוחה. להארה בחדרי מגורים, משרדים, שטחים מסחריים, מבואות ועוד.


מק"ט - 17830003
דגם - LV800STB
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 220-240V 50-60Hz | IP40 | מתאים לדרישות התקן הישראלי

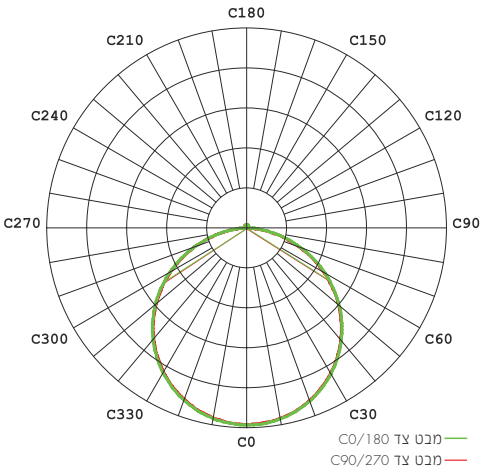



התקנה קלה - חצי סיבוב בקליק





DIMENSIONS & WEIGHT — מידות ומשקל

Height	25mm
Diameter	800mm
Product weight	5150g

MATERIALS & COLORS — מבנה וגימור

Product color	black
Body material	ABS
Protection class IEC 62262	IK06
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	64W
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Dimmable mode	Yes

CERTIFICATES & STANDARDS תקנים

Nisko Class	ECO 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
ISI Marking	√
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
CE	IEC 60598-1 IEC 60598-2-1 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP40
Protection class IK 62262 (shock resistance)	IK06

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	135Lm/W
Luminous flux	8600Lm
CCT	12CCTK
CRI	>80
LED manufacturer	LVMING
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין < 41, המעיין < קבוצת ניסקו בע"מ