צמוד תקרה מלבן דק לבן TIME 64W 120X30CM IP40 12CCT




סדרת גופי תאורה צמודי תקרה דקים במיוחד במגוון גדלים והספקים.
יעילות אורית גבוהה במיוחד 120Lm/W, דרייבר איכותי ללא ריצוד וכיסוי פרוסט מונע סנוור. התקנה קלה ונוחה. להתקנה בחדרי מגורים, משרדים, שטחים מסחריים, מבואות ועוד.

מק"ט - 17830008


דגם - LV1200 WHITE

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP40
- CLASS2
- אייקון של 240-220 וולט 60-50 הרץ
- 3 שנות אחריות

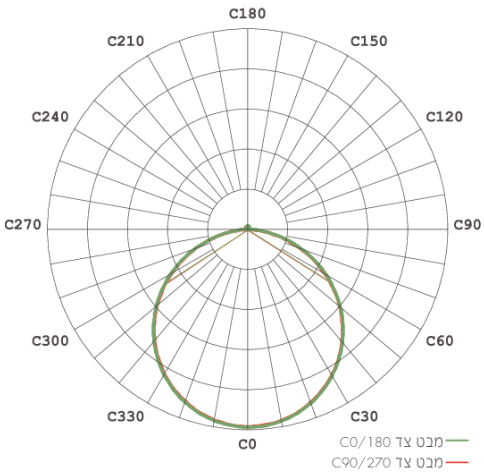





DIMENSIONS & WEIGHT

Width	1200mm
Length	300mm
Height	24mm
Product weight	3800g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	ABS
Cover finishing	IK08
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	64W
Nominal current	0.26A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.97
THDi	<16%

CERTIFICATES & STANDARDS

Nisko Class	ECO 3 Years
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
CE	IEC 60598-1 IEC 60598-2-1 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP40
Protection class IK 62262 (shock resistance)	IK08

APPLICATION & MOUNTING

Ambient temperature range	0...+35°C

PERFORMANCE

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

Luminous efficacy	120Lm/W
Luminous flux	7680Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	LVMING
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 > מודיעין 41, המעיין > קבוצת ניסקו בע"מ