

צמוד תקרה מלבן דק שחור TIME 64W 120X30CM IP40 12CCT

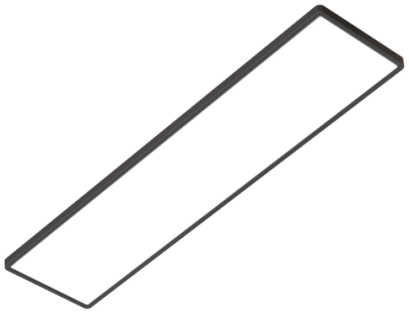


סדרת גופי תאורה צמודי תקרה דקים במיוחד במגוון גדלים והספקים. יעילות אורית גבוהה במיוחד 120Lm/W, דרייבר איכותי ללא ריצוד וכיסוי פרוסט מונע סנוור. התקנה קלה ונוחה. להתקנה בחדרי מגורים, משרדים, שטחים מסחריים, מבואות ועוד.


מק"ט - 17830009
דגם - LV1200 BLACK
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 220-240V 50-60Hz | IP40 | מתאים לדרישות התקן הישראלי

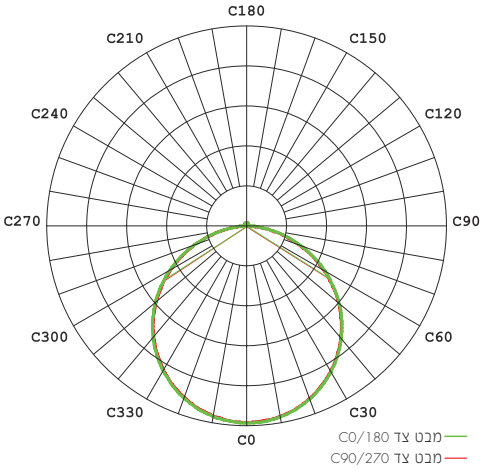



התקנה קלה - חצי סיבוב בקליק





DIMENSIONS & WEIGHT — מידות ומשקל

Width	1200mm
Length	300mm
Height	24mm
Product weight	3800g

MATERIALS & COLORS — מבנה וגימור

Product color	black
Body material	ABS
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	64W
Nominal current	0.26A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.97
THDi	<16%

CERTIFICATES & STANDARDS תקנים

Nisko Class	ECO 3 Years
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
CE	IEC 60598-1 IEC 60598-2-1 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP40
Protection class IK 62262 (shock resistance)	IK08

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	120Lm/W
Luminous flux	7680Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	LVMING
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ