
# תאורת רחוב אפור KFIR 50W C1 IP65 אור ניטרלי




סדרת תאורת לד בעיצוב חדשני ובדרגת אטימות IP65. הגוף כולל מגן נחשולי מתח SPD במגוון הספקים, ומספק שטף ויעילות אורית מרשימים. פתרון חסכוני המבטיח עשרות אלפי שעות עבודה. ניתן להתקנה אופקית או אנכית בעמוד 2 צול, בגבהים של 4-12 מטרים. כולל זרוע מתכוננת. להארת רחובות, חניות, שטחים פתוחים ועוד.

מק"ט - 17830600
דגם - SC-S018-50
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 100-277V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

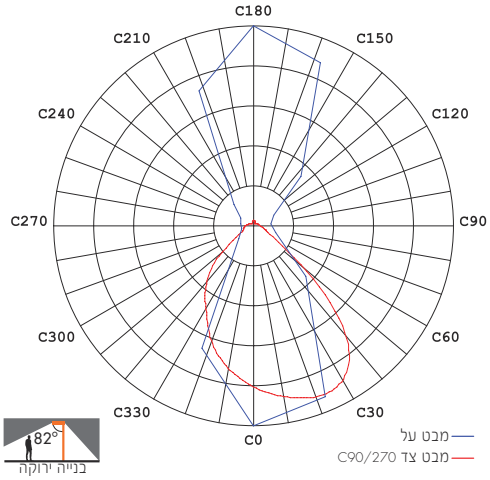

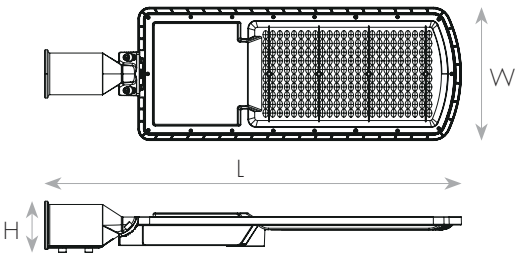


| DIMENSIONS & WEIGHT | מידות ומשקל |
|---|---|
| Width | 169mm |
| Length | 493mm |
| Height | 74mm |
| Product weight | 1400g |

| MATERIALS & COLORS | מבנה וגימור |
|---|---|
| Product color | Granite gray |
| Body material | aluminum |
| Protection class IEC 62262 | IK08 |
| Cover finishing | Clear |
| Cover material | PC |

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 50W |
| Nominal current | 0.22A |
| Nominal voltage | 100-277V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver output current | 450mA |
| Power factor | >0.97 |
| Dimmable mode | No |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | ECO 3 Years |
| Israeli Standard | Ta=50°C<br>IS 20-1<br>IS 20-2-3 |
| CE | IEC 60598-1<br>IEC 60598-2-3<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG1 |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| IP 60529 | IP65 |
| Protection class IK 62262 (shock resistance) | IK08 |
| Green Building | ISO 14001 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Outdoor |
| Mounting type | Pole |
| Mounting location | Pole |
| Type of protection | IP65 |
| Ambient temperature range | 0...+50°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 30000Hrs |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 115Lm/W |
| Luminous flux | 5750Lm |
| CCT | 4000K |
| CRI | >70 |
| LED manufacturer | MINGTU |
| Chip type | SMD 3030 |
| Beam angle | 140X70° |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ