תאורת רחוב אפור KFIR 300W C1 IP65 אור ניטרלי




סדרת תאורת לד בעיצוב חדשני ובדרגת אטימות IP65. הגוף כולל מגן נחשולי מתח SPD במגוון הספקים, ומספק שטף ויעילות אורית מרשימים. פתרון חסכוני המבטיח עשרות אלפי שעות עבודה. ניתן להתקנה אופקית או אנכית בעמוד 2 צול, בגבהים של 4-12 מטרים. כולל זרוע מתכוננת. להארת רחובות, חניות, שטחים פתוחים ועוד.

מק"ט - 17830607
דגם - SC-S018-300
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 100-277V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי



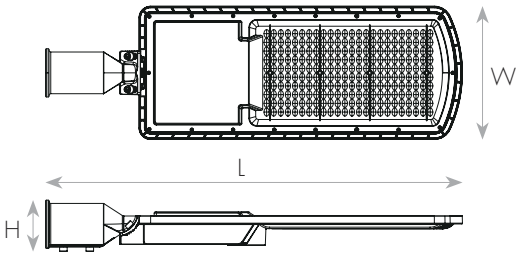

DIMENSIONS & WEIGHT	מידות ומשקל
Width	244.5mm
Length	782mm
Height	88.5mm
Product weight	3300g

MATERIALS & COLORS	מבנה וגימור
Product color	Granite gray
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	300W
Nominal current	1.37A
Nominal voltage	100-277V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver output current	1200mA
Power factor	>0.95
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	ECO 3 Years
Israeli Standard	Ta=50°C IS 20-1 IS 20-2-3
CE	IEC 60598-1 IEC 60598-2-3 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Pole
Mounting location	Pole
Type of protection	IP65
Ambient temperature range	0...+50°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	115Lm/W
Luminous flux	34500Lm
CCT	4000K
CRI	>70
LED manufacturer	MINGTU
Chip type	SMD 3030
Beam angle	140X70°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין