
צמוד תקרה זהב TIME 32W 400MM IP40 3CCT




סדרת צמודי תקרה בעיצוב דק וביעילות אורית גבוהה 120Lm/W. אפשרות לשינוי גוון האור - חם, קר או ניטרלי. דרייבר איכותי ללא ריצוד, בסיס PC וכיסוי פרוסט מונע סנוור. התקנה קלה ונוחה בקליק על ידי סיבוב, וללא צורך בפתיחת הגוף. להארה בחדרי מגורים, משרדים, שטחים מסחריים, מבואות, תאורה כללית ועוד.


מק"ט - 17840167
דגם - LV32CWGD
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 220-240V 50-60Hz | IP40 | מתאים לדרישות התקן הישראלי

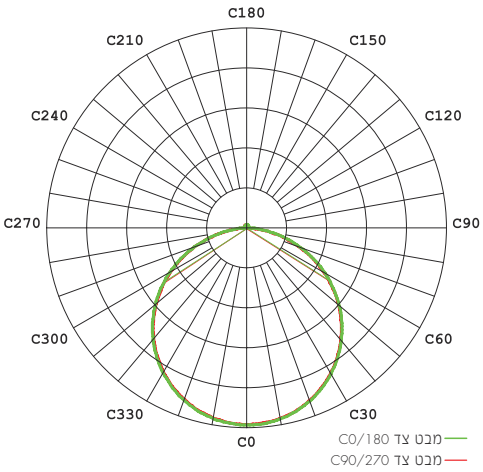



התקנה קלה - חצי סיבוב בקליק





DIMENSIONS & WEIGHT — מידות ומשקל

Height	27mm
Diameter	400mm
Product weight	1130g

MATERIALS & COLORS — מבנה וגימור

Product color	gold
Body material	ABS
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	31W
Nominal current	0.25A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.54
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	ECO 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
CE	IEC 60598-1 IEC 60598-2-1 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP40
Protection class IK 62262 (shock resistance)	IK08

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	120Lm/W
Luminous flux	3840Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	LVMING
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ