
# צמוד תקרה שחור TIME 48W 600MM IP40 3CCT




סדרת צמודי תקרה בעיצוב דק וביעילות אורית גבוהה 120Lm/W. אפשרות לשינוי גוון האור - חם, קר או ניטרלי. דרייבר איכותי ללא ריצוד, בסיס PC וכיסוי פרוסט מונע סנוור. התקנה קלה ונוחה בקליק על ידי סיבוב, וללא צורך בפתיחת הגוף. להארה בחדרי מגורים, משרדים, שטחים מסחריים, מבואות, תאורה כללית ועוד.


מק"ט - 17840179
דגם - LV600ECWBK
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 220-240V 50-60Hz | IP40 | מתאים לדרישות התקן הישראלי

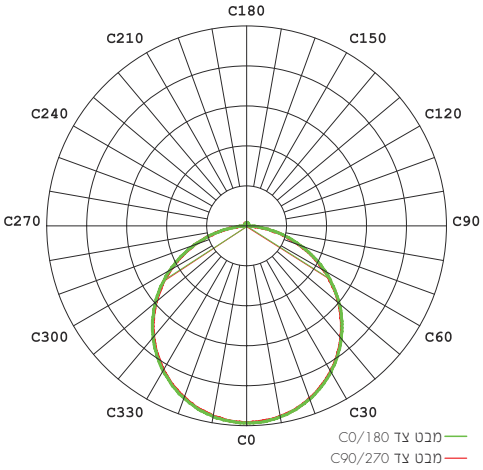

התקנה קלה - חצי סיבוב בקליק






## DIMENSIONS & WEIGHT — מידות ומשקל

| | |
|---|---|
| Height | 29mm |
| Diameter | 600mm |
| Product weight | 2710g |

## MATERIALS & COLORS — מבנה וגימור

| | |
|---|---|
| Product color | black |
| Body material | ABS |
| Protection class IEC 62262 | IK08 |
| Cover finishing | milky |
| Cover material | PC |

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 48W |
| Nominal current | 0.35A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 2 |
| Operating mode | Internal LED driver |
| Driver manufacturer | Integrated |
| Power factor | >0.53 |
| Dimmable mode | No |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | ECO 3 Years |
| Israeli Standard | Ta=45°C<br>IS 20-1<br>IS 20-2-1 |
| CB | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031 |
| CE | IEC 60598-1<br>IEC 60598-2-1<br>IEC 62493 |
| Photobiological Safety | IEC 62471 RG0 (Exempt)<br>IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| IP 60529 | IP40 |
| Protection class IK 62262 (shock resistance) | IK08 |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Surface |
| Mounting location | Ceiling |
| Type of protection | IP40 |
| Ambient temperature range | 0...+35°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 30000Hrs |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 120Lm/W |
| Luminous flux | 5760Lm |
| CCT | 3000/4000/6000K |
| CRI | >80 |
| LED manufacturer | LVMING |
| Chip type | SMD 2835 |
| Beam angle | 120° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין