פאנל לד על הטיח לבן YUVAL 72W 30X120CM 3CCT




גוף תאורת לד על הטיח 30X120 בעיצוב דק וחדשני. יעילות אורית ושטף אורי גבוהים, מערכות קירור איכותיות, כיסוי פרוסט מונע סנוור ואפשרות בחירת גוון האור. להארת מטבחים, חדרים, משרדים, לובי, תאורה כללית ועוד.


מק"ט - 17840325

דגם - XF-XXK3012LY72M W

קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP20 IP44 | מתאים לדרישות התקן הישראלי

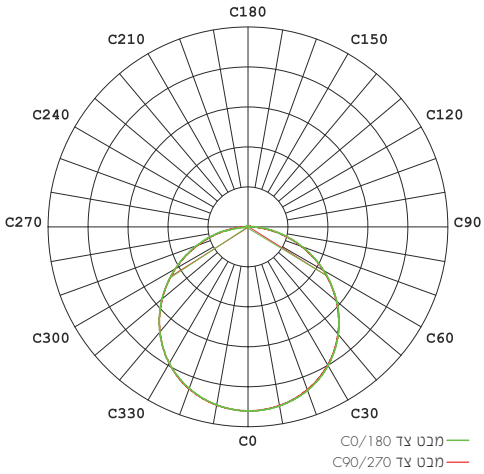

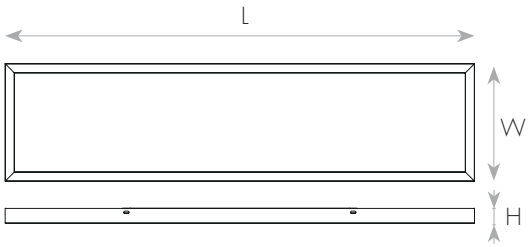



DIMENSIONS & WEIGHT — מידות ומשקל

Width	300mm
Length	1200mm
Height	40mm
Product weight	2180g

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	aluminum
Cover finishing	milky
Cover material	PC
Lens material	PMMA

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	72W
Nominal current	0.33A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	External LED driver
Driver manufacturer	AGT
Driver model	AGT-M5-N75C-0450
Driver output current	450mA
Power factor	>0.98
THDi	<7%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20/IP44
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling
Type of protection	IP20/IP44
Ambient temperature range	-5...+45°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
Driver lifespan	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	100Lm/W
Luminous flux	7200Lm
CCT	3000/4000/6000K
CRI	>82
LED manufacturer	LVMING
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
UGR level	<22
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >