
פאנל לד שקוע אינטגרלי לבן 6W 10*10 3CCT



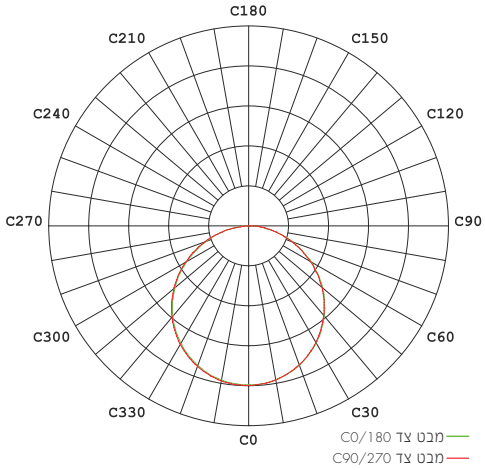

סדרת גופי לד שקועי תקרה עם דרייבר מובנה המונע ריצוד. כיסוי אופטי של פריזמה אקרילית, לצד אפשרות בחירת גוון אור. עשוי סגסוגת אלומיניום-פלסטיק לקירור אופטימלי, ומספק חיסכון של עד 70% בצריכת החשמל ובאחזקה הכללית. התקנה קלה ונוחה. להארת משרדים, מוסדות ובתים.

מק"ט - 17840363
דגם - GLM-NPL-6W-CCT-S
קישור לדף מוצר ואביזרים נלווים באתר

2 YEAR GUARANTEE | VALUE | 90-250V 50-60Hz | IP3X | IK04 | מתאים לדרישות התקן הישראלי

DIMENSIONS & WEIGHT — מידות ומשקל

Width	121mm
Length	121mm
Height	29mm
Cut hole width	105mm
Product weight	210g
Cut hole length	105mm

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	ABS
Protection class IEC 62262	IK04
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	6W
Nominal current	0.03A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.80
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-10...+45°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	70Lm/W
Luminous flux	420Lm
CCT	3000/4000/6000K
CRI	>82
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ