
# פאנל לד שקוע לבן אינטגרלי 18W 21*21 3CCT



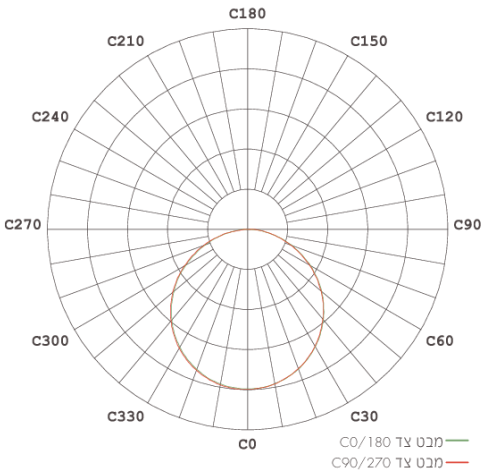


סדרת גופי לד שקועי תקרה עם דרייבר מובנה המונע ריצוד. כיסוי אופטי של פריזמה אקרילית, לצד אפשרות בחירת גוון אור. עשוי סגסוגת אלומיניום-פלסטיק לקירור אופטימלי, ומספק חיסכון של עד 70% בצריכת החשמל ובאחזקה הכללית. התקנה קלה ונוחה. להארת משרדים, מוסדות ובתים.

מק"ט - 17840365

דגם - GLM-NPL-18W-CCT-S

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK04
- IP3X
- CLASS2
- 90-250 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- שנתיים אחריות

# DIMENSIONS & WEIGHT

| | |
|---|---|
| Width | 226mm |
| Length | 226mm |
| Height | 29mm |
| Cut hole width | 210 |
| Product weight | 570g |
| Cut hole length | 210 |

# MATERIALS & COLORS

| | |
|---|---|
| Cable surface [mm2] | white |
| Protection class IEC 62262 | ABS |
| Cover material | milky |
| Lens material | PC |

# ELECTRICAL DATA

| | |
|---|---|
| Nominal wattage | 18W |
| Nominal current | 0.09A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 2 |
| Operating mode | Internal LED driver |
| Driver manufacturer | Integrated |
| Power factor | >0.85 |
| Dimmable mode | No |

# CERTIFICATES & STANDARDS

| | |
|---|---|
| Nisko Class | VALUE 2 Years |
| Israeli Standard | Ta=45°C<br>IS 20-1<br>IS 20-2-2 |
| CB | IEC 60598-1<br>IEC 60598-2-2<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| IP 60529 | IP20 |
| ISO 9001 | ✓ |

# APPLICATION & MOUNTING

| | |
|---|---|
| Ambient temperature range | -10...+45°C |

# PERFORMANCE

| | |
|---|---|
| Lifespan (Hr) | 30000Hrs |

# PHOTOMETRIC DATA

| | |
|---|---|
| Luminous efficacy | 81Lm/W |
| Luminous flux | 1450Lm |
| CCT | 3000/4000/6000K |
| CRI | >82 |
| LED manufacturer | MLS |
| Chip type | SMD 2835 |
| Beam angle | 120° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 > מודיעין 41, המעיין > קבוצת ניסקו בע"מ