
פאנל לד שקוע לבן אינטגרלי 18W 21*21 3CCT



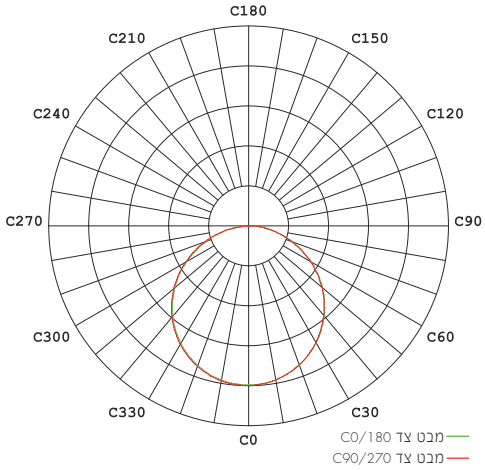

סדרת גופי לד שקועי תקרה עם דרייבר מובנה המונע ריצוד. כיסוי אופטי של פריזמה אקרילית, לצד אפשרות בחירת גוון אור. עשוי סגסוגת אלומיניום-פלסטיק לקירור אופטימלי, ומספק חיסכון של עד 70% בצריכת החשמל ובאחזקה הכללית. התקנה קלה ונוחה. להארת משרדים, מוסדות ובתים.

מק"ט - 17840365
דגם - GLM-NPL-18W-CCT-S
קישור לדף מוצר ואביזרים נלווים באתר

2 YEAR GUARANTEE | VALUE | 90-250V 50-60Hz | IP3X | IK04 | מתאים לדרישות התקן הישראלי

DIMENSIONS & WEIGHT	מידות ומשקל
Width	226mm
Length	226mm
Height	29mm
Cut hole width	210mm
Product weight	570g
Cut hole length	210mm

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	ABS
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	18W
Nominal current	0.09A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.85
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-10...+45°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	81Lm/W
Luminous flux	1450Lm
CCT	3000/4000/6000K
CRI	>82
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ