פאנל לד צמוד לבן אינטגרלי "8 18W 240*240 3CCT



סדרת גופי לד צמודי תקרה עם דרייבר מובנה המונע ריצוד. כיסוי אופטי של פריזמה אקרילית, לצד אפשרות בחירת גוון אור. עשוי סגסוגת אלומיניום-פלסטיק לקירור אופטימלי, ומספק חיסכון של עד 70% בצריכת החשמל ובאחזקה הכללית. התקנה קלה ונוחה. להארת משרדים, מוסדות ובתים.

מק"ט - 17840368

דגם - GLM-NSF-18W-CCT-R

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK04
- IP3X
- CLASS2
- 90-250 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- שנתיים אחריות

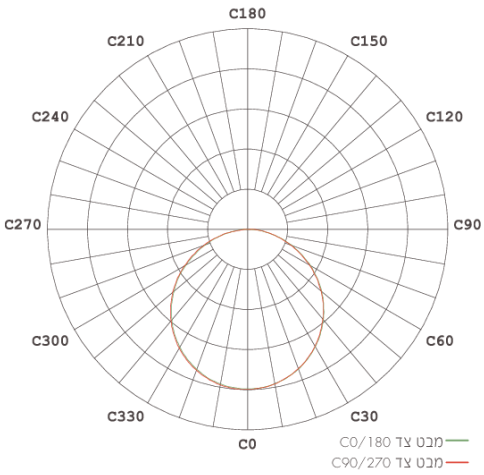

DIMENSIONS & WEIGHT

Height	35mm
Diameter	226mm
Product weight	405g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	ABS
Cover finishing	IK04
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	18W
Nominal current	0.09A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.85
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP3X
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	✓
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

APPLICATION & MOUNTING

Ambient temperature range	-10...+45°C

PERFORMANCE

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

Luminous efficacy	81Lm/W
Luminous flux	1450Lm
CCT	3000/4000/6000K
CRI	>82
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >