
פאנל לד צמוד לבן אינטגרלי "8 18W 3CCT 240*240



סדרת גופי לד צמודי תקרה עם דרייבר מובנה המונע ריצוד. כיסוי אופטי של פריזמה אקרילית, לצד אפשרות בחירת גוון אור. עשוי סגסוגת אלומיניום-פלסטיק לקירור אופטימלי, ומספק חיסכון של עד 70% בצריכת החשמל ובאחזקה הכללית. התקנה קלה ונוחה. להארת משרדים, מוסדות ובתים.

מק"ט - 17840368
דגם - GLM-NSF-18W-CCT-R
קישור לדף מוצר ואביזרים נלווים באתר

2 YEAR GUARANTEE | VALUE | 90-250V 50-60Hz | IP3X | IK04 | מתאים לדרישות התקן הישראלי

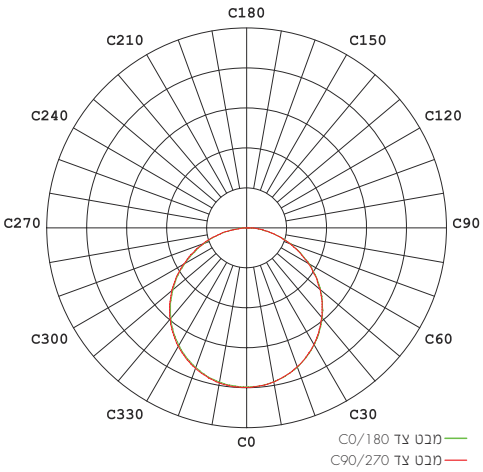

DIMENSIONS & WEIGHT — מידות ומשקל

Height	35mm
Diameter	226mm
Product weight	405g

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	ABS
Protection class IEC 62262	IK04
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	18W
Nominal current	0.09A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.85
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 2 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP3X
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	√
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Surface
Mounting location	Ceiling Wall
Type of protection	IP3X
Ambient temperature range	-10...+45°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	81Lm/W
Luminous flux	1450Lm
CCT	3000/4000/6000K
CRI	>82
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >