
# ספוט לד לבן לפס צבירה מגנטי TIKTOK
# SPOT 5W 3CCT



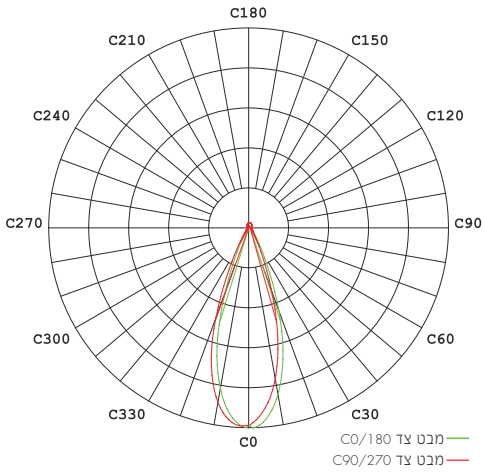


ספוטים מתכווננים למערכת פסי צבירה מגנטיים 48V בעיצוב עדין ואלגנטי, מקדם מסירת צבע גבוה במיוחד CRI>90 וזווית הארה של 36°. הספוט מבליט ומחמיא לאובייקטים ולאלמנטים בהתאם לצרכים, הוורסטיליות MIX&MATCH מאפשרת שילובים ומשחקי אור וצל, ומאפשר מגוון עצום של פתרונות מודולריים. להארה בבתי מגורים, מלונות, חנויות, מסעדות ועוד.

מק"ט - 19185201
דגם - MY-20-6321 5W WHITE
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 48V | IP40 | IK04 | מתאים לדרישות התקן הישראלי



## DIMENSIONS & WEIGHT — מידות ומשקל

| | |
|---|---|
| Height | 82.5mm |
| Diameter | 28mm |
| Product weight | 110g |

## MATERIALS & COLORS — מבנה וגימור

| | |
|---|---|
| Product color | white |
| Body material | aluminum |
| Protection class IEC 62262 | IK04 |
| Cover finishing | Clear |
| Cover material | PC |

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 4.4W |
| Nominal current | 0.04A |
| Nominal voltage | 48V |
| Mains frequency | 50/60Hz |
| Protection class | Class 3 |
| Operating mode | External LED driver |
| Driver manufacturer | Integrated |
| Driver output current | 100mA |
| Power factor | >0.48 |
| Dimmable mode | No |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-1 |
| CE | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | √ |
| IP 60529 | IP40 |
| Protection class IK 62262 (shock resistance) | IK04 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Trackline |
| Mounting location | Ceiling |
| Type of protection | IP40 |
| Ambient temperature range | -10...+40°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 30000Hrs |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 73Lm/W |
| Luminous flux | 320Lm |
| CCT | 3000/4000/6000K |
| CRI | >90 |
| LED manufacturer | EVERCORE |
| Chip type | COB |
| Beam angle | 36° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין