
ספוט לד לבן לפס צבירה מגנטי TIKTOK
SPOT 12W 3CCT



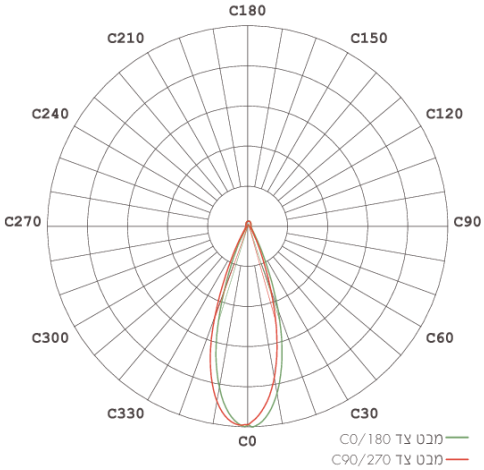

ספוט לד מתכוונן למערכת פסי צבירה מגנטיים 48V בעיצוב עדין ואלגנטי, מקדם מסירת צבע גבוה במיוחד CRI>90 וזווית הארה של 36°, הספוט מבליט ומחמיא לאובייקטים ולאלמנטים בהתאם לצרכים, וורסטיליות MIX&MATCH מאפשרת שילובים ומשחקי אור וצל, ליצירת מגוון עצום של פתרונות מודולריים, להארה בבתי מגורים, מלונות, חנויות, מסעדות ועוד,

מק"ט - 19185219

דגם - MY-20-6079 12W WHITE

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK04
- IP40
- CLASS3
- 48V
- מוצר בדרגת VALUE
- 3 שנות אחריות



DIMENSIONS & WEIGHT

Height	100mm
Diameter	46mm
Product weight	140g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	aluminum
Cover finishing	IK04
Cover material	Clear
Lens material	PC

ELECTRICAL DATA

Nominal wattage	12W
Nominal current	0.1A
Nominal voltage	48V
Mains frequency	50/60Hz
Protection class	Class 3
Operating mode	External LED driver
Driver manufacturer	Integrated
Driver output current	250mA
Power factor	>0.53
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
IP 60529	IP40
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	✓
מחירון דקל	88.082.0820

APPLICATION & MOUNTING

Ambient temperature range	-10...+40°C

PERFORMANCE

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

Luminous efficacy	72Lm/W
Luminous flux	860Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	EVERCORE
Chip type	COB
Beam angle	36°
CIE class	Semi-Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 > מודיעין ,41 המעיין > קבוצת ניסקו בע"מ