
ספוט לד שטוח לבן לפס צבירה מגנטי
TIKTOK FLAT1.2 40W 120CM 3CCT



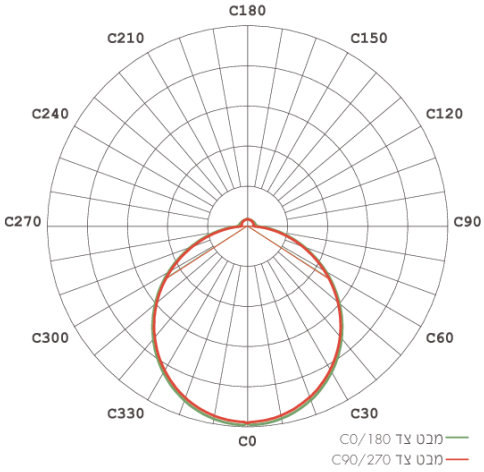

תאורה אלגנטית ומדויקת בעיצוב שטוח בקו אפס עם פרופיל המערכת, כולל כיסוי חלבי וזווית פיזור רחבה של 120°, מקדם מסירת צבע מרשים במיוחד (CRI>90) ושלושה גווני אור בגוף אחד: חם, ניטרלי וקר, להתאמה מושלמת לצרכים משתנים, מערכת MIX&MATCH מאפשרת משחקי אור וצל ייחודיים, ליצירת מגוון רחב של פתרונות תאורה מודולריים ומותאמים אישית, להארה בבתי מגורים, מלונות, חנויות, מסעדות, ועוד,

מק"ט - 19185313

דגם - MY-20-6210 40W WHITE

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK04
- IP40
- CLASS3
- 48V
- מוצר בדרגת VALUE
- 3 שנות אחריות



DIMENSIONS & WEIGHT

Width	1200mm
Length	22mm
Height	23mm
Product weight	200g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	aluminum
Cover finishing	IK04
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	44W
Nominal current	0.32A
Nominal voltage	48V
Mains frequency	50/60Hz
Protection class	Class 3
Operating mode	External LED driver
Driver manufacturer	Integrated
Driver output current	1000mA
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
IP 60529	IP40
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	✓
מחירון דקל	88.082.0900

APPLICATION & MOUNTING

Ambient temperature range	-10...+40°C

PERFORMANCE

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

Luminous efficacy	84Lm/W
Luminous flux	3700Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	JF
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 > מודיעין ,41 המעיין > קבוצת ניסקו בע"מ