ספוט לד שטוח פינה שחור לפס צבירה מגנטי TIKTOK L30 20W 30X30CM 3CCT



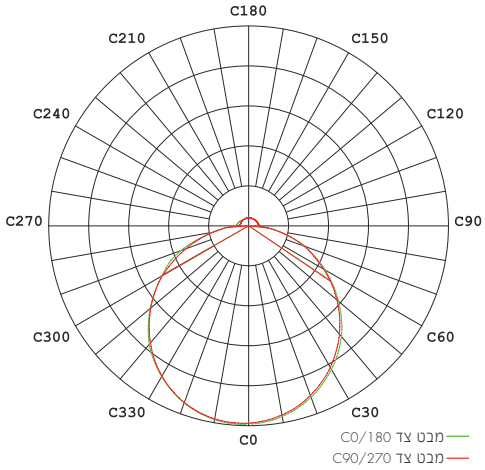

תאורה אלגנטית ומדויקת בעיצוב שטוח בקו אפס עם פרופיל המערכת, כולל כיסוי חלבי וזווית פיזור רחבה של 120°, מקדם מסירת צבע מרשים במיוחד (CRI>90) ושלושה גווני אור בגוף אחד: חם, ניטרלי וקר, להתאמה מושלמת לצרכים משתנים, מערכת MIX&MATCH מאפשרת משחקי אור וצל ייחודיים, מה שמוביל למגוון רחב של פתרונות תאורה מודולריים ומותאמים אישית, להארה בבתי מגורים, מלונות, חנויות, מסעדות, ועוד,

מק"ט - 19185316
דגם - MY-20-6270 20W BLACK
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 48V | IP40 | IK04 | מתאים לדרישות התקן הישראלי



DIMENSIONS & WEIGHT	מידות ומשקל
Width	330mm
Length	330mm
Height	23mm
Product weight	150g

MATERIALS & COLORS	מבנה וגימור
Product color	black
Body material	aluminum
Protection class IEC 62262	IK04
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	20W
Nominal current	0.16A
Nominal voltage	48V
Mains frequency	50/60Hz
Protection class	Class 3
Operating mode	External LED driver
Driver manufacturer	Integrated
Driver output current	500mA
Power factor	>0.56
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP40
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	√
מחירון דקל	88.082.0910

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Trackline
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	-10...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	80Lm/W
Luminous flux	1600Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	JF
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >