
צמוד קיר NEMO 8W IP65 אור ניטרלי




גוף תאורה צמוד קיר בדרגת אטימות IP65. מכיל כמות לדים גדולה לכיסוי ואחידות אורית מושלמת. הגוף כולל חיישן אור מגן ונסתר להארכת חיי הגוף ופלס מובנה. התקנה קלה ונוחה ללא צורך בפתיחת הגוף. ניתן לרכוש בנפרד גם מסגרת כסופה או שחורה. להארת שלטי כתובת במבנה היקפי.

מק"ט - 70060001
דגם - YY-WL19-3222SBF-LS
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

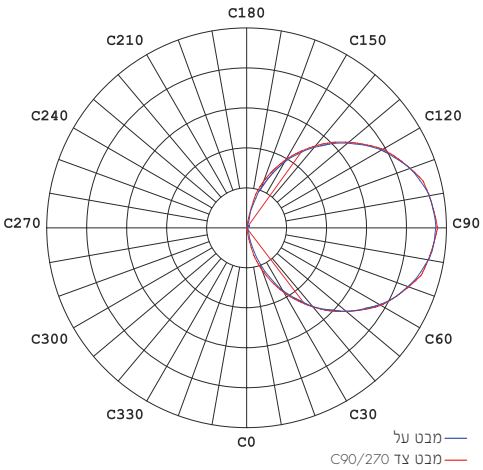

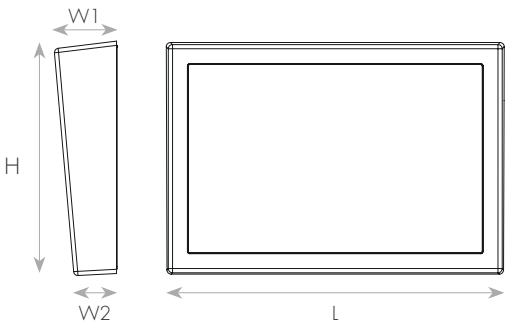



DIMENSIONS & WEIGHT — מידות ומשקל

Width	60mm
Length	320mm
Height	220mm
Product weight	970g

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	8.2W
Nominal current	0.05A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver output current	280mA
Power factor	>0.64
THDi	<18%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	√
מחירון דקל	88.082.1000

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	36000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	104Lm/W
Luminous flux	850Lm
CCT	4000K
CRI	>80
LED manufacturer	DACOL
Chip type	SMD 2835
Beam angle	105°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ