
צמוד קיר אפור ORBIT14W IP65 אור ניטרלי




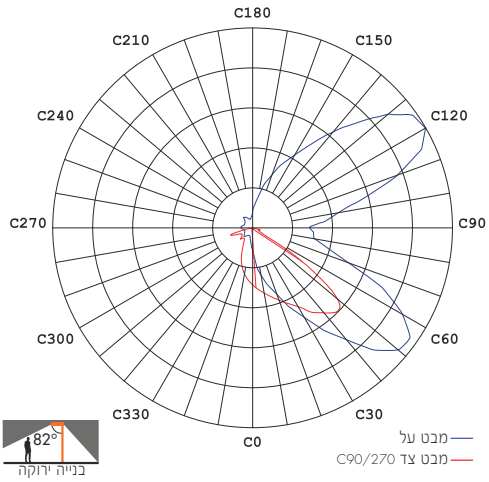

גופי תאורה צמודי קיר עם טאץ' גוון אור מחמיא במיוחד. מקדם מסירת צבע גבוה, דרגת אטימות IP65 ויעילות אורית מרשימה ביותר. דרייבר LIFUD המבטיח עשרות אלפי שעות עבודה והשגת חיסכון משמעותי בצריכת החשמל. חיווט יעיל, ללא צורך בפתיחת גוף התאורה וללא פגיעה באטימות. שימוש באנטיגון ייעודי בחלקו האחורי של גוף התאורה. פתרון מושלם להארת קירות, היקפי מבנים, מעברים, כניסות לחניונים ועוד.

מק"ט - 70304014
דגם - K40233004
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

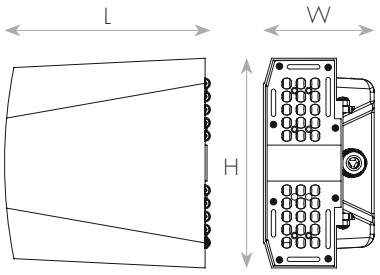



DIMENSIONS & WEIGHT — מידות ומשקל

Width	179mm
Length	193mm
Height	102mm
Product weight	1471g

MATERIALS & COLORS — מבנה וגימור

Product color	gray
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	PS
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	14.6W
Nominal current	0.07A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF020YS0500H(S)Pro
Driver output current	500mA
Power factor	>0.93
THDi	<14%
Output ripple current	≤5%
Inrush current	21A
Inrush current time T_{h50}	170µs
Max. no. of lum. On circuit break. B10 A	31
Max. no. of lum. On circuit break. B16 A	52
Max. no. of lum. On circuit break. C10 A	50
Max. no. of lum. On circuit break. C16 A	85
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900103 LDV 10025020
Optional driver 1-10V	LF 17900208
Optional driver DALI	LF 17900251 LF 17900252
Optional driver TRIAC	LF 17900033

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-11 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1 IEC 62778 RG0 (2m)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
Binning	√ Declaration SDCM ≤ 3
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√
אישורים נוספים	√ משרד הביטחון

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	130000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>40000Hrs
Driver lifespan	120000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	127Lm/W
Luminous flux	1850Lm
CCT	4000K
CRI	>80
LED manufacturer	SEOUL SEMICONDUCTOR
Chip type	SMD 3030
SDCM	≤3
Beam angle	110X45°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ