
הרמטי לבן BALCON 20W IP66 3CCT




סדרת גופי תאורת לד דקורטיביים מוגני מים. יעילות אורית גבוהה ואפשרות בחירה לגוון האור - חם, ניטרלי או קר, תוך שימוש במפסק ייעודי המותקן בתיבת החיבורים. התקנה נוחה ומהירה, הזנה אסתטית בגב גוף התאורה, ניתן לשרשור. לשימוש במרפסות, פרגולות מקורות, חנויות, משרדים, לובאים, מחסנים ביתיים, מטבחים, מעל למראות ועוד.

מק"ט - 70337520
דגם - SL-ISR-20W-C000065A
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | IP66 | IK08 | מתאים לדרישות התקן הישראלי

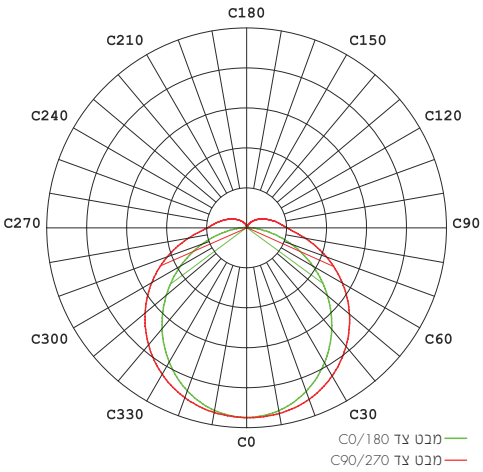

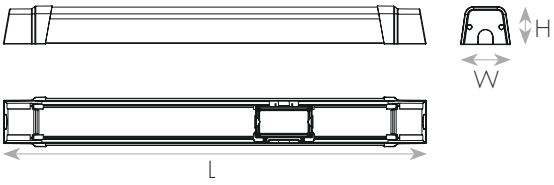



DIMENSIONS & WEIGHT	מידות ומשקל
Width	69mm
Length	580mm
Height	53mm
Product weight	400g

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	19W
Nominal current	0.09A
Nominal voltage	180-265V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver model	EVB20LD72260
Power factor	>0.87
THDi	<25%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP66
Protection class IK 62262 (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface
Mounting location	Ceiling Wall
Type of protection	IP66
Ambient temperature range	0...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>49000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	121Lm/W
Luminous flux	2300(4K)Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	BMTC
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ