
הרמטי לבן BALCON 40W IP66 3CCT



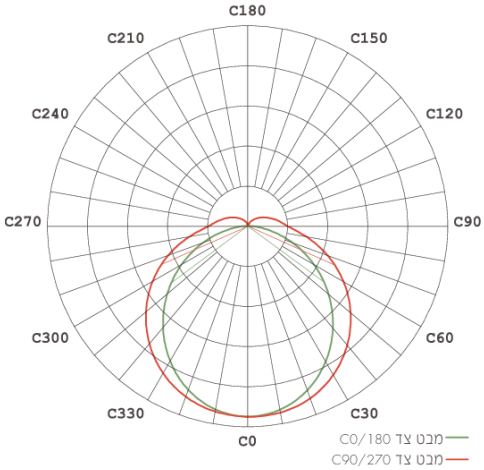


סדרת גופי תאורת לד דקורטיביים מוגני מים. יעילות אורית גבוהה ואפשרות בחירה לגוון האור - חם, ניטרלי או קר, תוך שימוש במפסק ייעודי המותקן בתיבת החיבורים. התקנה נוחה ומהירה, הזנה אסתטית בגב גוף התאורה, ניתן לשרשור. לשימוש במרפסות, פרגולות מקורות, חנויות, משרדים, לובאים, מחסנים ביתיים, מטבחים, מעל למראות ועוד.

מק"ט - 70337540

דגם - SL-ISR-40W-C000065A

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK08
- IP66
- CLASS2
- מוצר בדרגת VALUE
- 3 שנות אחריות

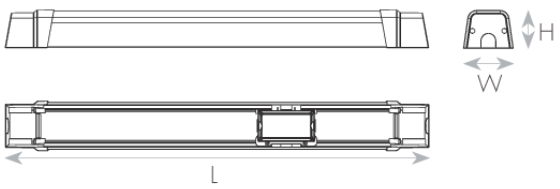



DIMENSIONS & WEIGHT

Width	69mm
Length	1180mm
Height	53mm
Product weight	600g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	PC
Cover finishing	IK08
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	36W
Nominal current	0.18A
Nominal voltage	180-265V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver model	EVB40LD106350
Power factor	>0.87
THDi	<26%
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=45°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
TM21	√ Ta=35°C
LM79	✓
IP 60529	IP66
Protection class IK 62262 (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	0...+35°C

PERFORMANCE

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>52000Hrs

PHOTOMETRIC DATA

Luminous efficacy	133Lm/W
Luminous flux	4800(4K)Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	BMTC
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >