# תאורת מראה גוף לבן RAIN IP44 15W אור חם



סדרת גופי תאורת מראה בעיצוב יוקרתי ובדרגת אטימות IP44. כוללים לדים איכותיים מבית LUMILEDS ודרייבר מוביל מבית TRIDONIC. להתקנה נוחה ומהירה בחדרי אמבטיה, מעל המראות ועוד.

מק"ט - 70338021
דגם - 22113
קישור לדף מוצר ואביזרים נלווים באתר

מתאים לדרישות התקן הישראלי | IK04 | IP44 | 220-240V 50-60Hz | PRO | 5 YEAR GUARANTEE



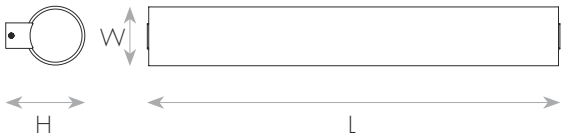


| DIMENSIONS & WEIGHT | מידות ומשקל |
|---|---|
| Width | 85mm |
| Length | 595mm |
| Height | 110mm |
| Product weight | 1890g |

| MATERIALS & COLORS | מבנה וגימור |
|---|---|
| Product color | white |
| Body material | aluminum |
| Protection class IEC 62262 | IK04 |
| Cover finishing | Clear |
| Cover material | PMMA |
| Lens material | PMMA |

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 15W |
| Nominal current | 0.07A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 2 |
| Operating mode | Internal LED driver |
| Driver manufacturer | TRIDONIC |
| Driver model | LC 19/200-350/54 Flex Ip SNC4 |
| Driver output current | 200-350mA |
| Power factor | >0.92 |
| THDi | <14% |
| Output ripple current | ≤5% |
| Inrush current | 15A |
| Inrush current time $T_{h50}$ | 100µs |
| Max. no. of lum. On circuit break. B10 A | 39 |
| Max. no. of lum. On circuit break. B16 A | 63 |
| Max. no. of lum. On circuit break. C10 A | 65 |
| Max. no. of lum. On circuit break. C16 A | 105 |
| Dimmable mode | No |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | PROFESSIONAL 5 Years |
| Israeli Standard | Ta=40°C<br>IS 20-1<br>IS 20-2-1 |
| CB | IEC 60598-1<br>IEC 60598-2-5<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62384<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| IP 60529 | IP44 |
| Protection class IK 62262 (shock resistance) | IK04 |
| Green Building | ISO 14001 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor |
| Mounting type | Surface |
| Mounting location | Wall |
| Type of protection | IP44 |
| Ambient temperature range | -10...+40°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 100000Hrs |
| Driver lifespan | 100000Hrs |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 53Lm/W |
| Luminous flux | 800Lm |
| CCT | 3000K |
| CRI | >90 |
| LED manufacturer | LUMILEDS |
| Chip type | SMD 2835 |
| Beam angle | 120° |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין < 41, המעיין < קבוצת ניסקו בע"מ