
שקוע תקרה לבן ZEUS 30W IP44 3CCT



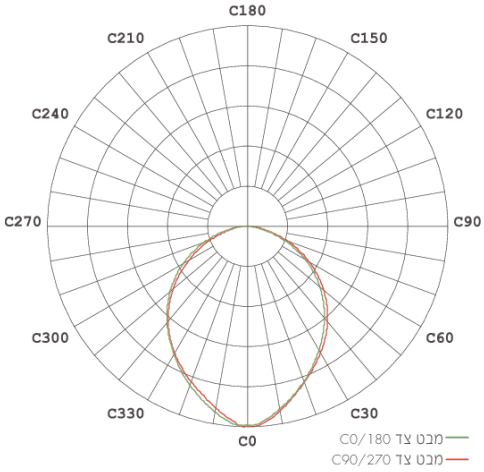


סדרת גופי תאורת LED בדרגת אטימות IP44. שלושה גווני אור בגוף אחד - חם, ניטרלי או קר. עיצוב פונקציונאלי ומינימליסטי, כיסוי אופטי ייחודי למניעת סנוור UGR<19, שימוש בדרייבר חיצוני ללא ריצוד. להארת מבואות, שטחים מסחריים, משרדים, מבנים ציבוריים, מסדרונות, מבואות ועוד.

מק"ט - 71170106

דגם - Q-22-30WR

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK04
- IP20 IP44
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

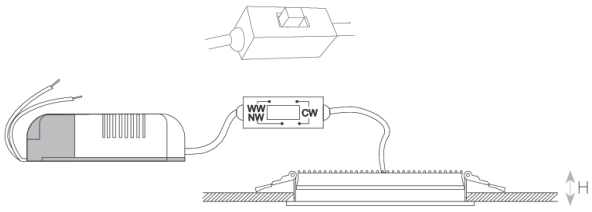



DIMENSIONS & WEIGHT

Height	35mm
Diameter	220mm
Product weight	739g
Cut hole diameter	205mm

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	aluminum
Cover finishing	IK04
Cover material	Anti Glare Crystal
Lens material	PC

ELECTRICAL DATA

Nominal wattage	28W
Nominal current	0.13A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF030YA(H)0700H
Driver output current	700mA
Power factor	>0.96
THDi	<20%
Output ripple current	≤0.5%
Inrush current	60A
Inrush current time T_{h50}	350µs
Max. no. of lum. On circuit break. B10 A	12
Max. no. of lum. On circuit break. B16 A	20
Max. no. of lum. On circuit break. C10 A	20
Max. no. of lum. On circuit break. C16 A	34
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900107
Optional driver 1-10V	LF 17900218
Optional driver DALI	LF 17900252
Optional driver TRIAC	LF 17900034 LF 17900035

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-2
CB	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-11 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20/IP44
Protection class IK 62262 (shock resistance)	IK04
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-20...+35°C

PERFORMANCE

Lifespan (Hr)	80000Hrs

PHOTOMETRIC DATA

Luminous efficacy	100Lm/W
Luminous flux	2800(4K)Lm
CCT	2700/3000/4000K
CRI	>80
LED manufacturer	XuYu
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין