
הרמטי אפור HYDRA 33W IP65 אור קר




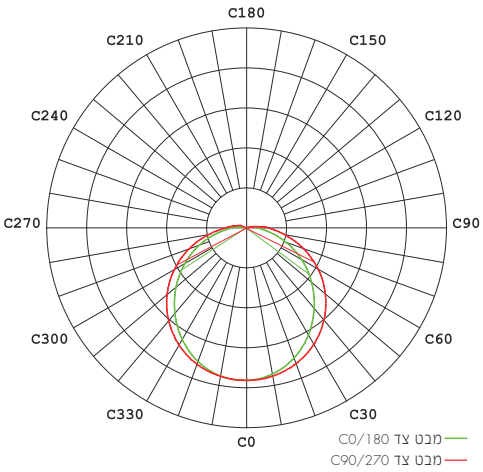

גוף תאורת לד ליניארי הרמטי IP65. יעילות אורית גבוהה במיוחד 110Lm/w. גוף הניתן לפתיחה ולהזנה מחלקו האחורי. סגירה באמצעות תופסני נירוסטה ייעודיים. להתקנה בחניונים, מחסנים, מבני תעשייה, מפעלים, מוסכים ועוד.

מק"ט - 71333341
דגם - LG07J-12-33-5.7K
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי





DIMENSIONS & WEIGHT	מידות ומשקל
Width	79mm
Length	1205mm
Height	68mm
Product weight	1350g

MATERIALS & COLORS	מבנה וגימור
Product color	gray
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	33W
Nominal current	0.15A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	HOWLONGER
Driver model	LSN40W024T2
Driver output current	240mA
Power factor	>0.97
THDi	<6%
Output ripple current	≤5%
Inrush current	24.6A
Inrush current time T_{h50}	204µs
Max. no. of lum. On circuit break. B10 A	67
Max. no. of lum. On circuit break. B16 A	83
Max. no. of lum. On circuit break. C10 A	70
Max. no. of lum. On circuit break. C16 A	112
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface
Mounting location	Ceiling Wall
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	75000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>43000Hrs
Driver lifespan	75000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	120Lm/W
Luminous flux	3950Lm
CCT	5700K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >