
# הרמטי חירום HYDRA IP65 33W 57K



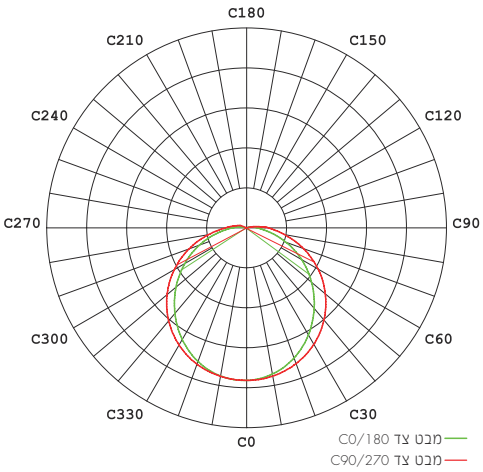



סדרה לינארית מקצועית לגופי תאורה דו-תכליתיים IP65. יעילות אורית גבוהה של עד 120lm/w וחיסכון משמעותי בצריכת החשמל ובתחזוקה לעומת גופי תאורה מסורתיים. פתיחת הגוף באמצעות קליפסים ממתכת, גישה לדרייבר, לקיט חירום ואפשרות לחיווט גם מגב גוף התאורה. תפוקה אורית גבוה במצב חירום של 460 lm ו-5 שנות אחריות. להארת חניונים, מסדרונות, מחסנים, תעשייה, מבני ציבור ועוד.

מק"ט - 71333343
דגם - LG07J-12-33-4K LED WATERPROOF LIGHT 5700K 33W EM
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי






## DIMENSIONS & WEIGHT — מידות ומשקל

| | |
|---|---|
| Width | 79mm |
| Length | 1205mm |
| Height | 68mm |

## MATERIALS & COLORS — מבנה וגימור

| | |
|---|---|
| Product color | gray |
| Body material | PC |
| Protection class IEC 62262 | IK08 |
| Cover finishing | milky |
| Cover material | PC |

NISKO

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 33/6W |
| Nominal current | 0.15A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 1 |
| Operating mode | Internal LED driver |
| Driver manufacturer | HOWLONGER |
| Driver model | LSN40W024T2 |
| Driver output current | 240mA |
| Power factor | >0.97 |
| THDi | <6% |
| Output ripple current | ≤5% |
| Inrush current | 24.6A |
| Inrush current time $T_{h50}$ | 204µs |
| Max. no. of lum. On circuit break. B10 A | 67 |
| Max. no. of lum. On circuit break. B16 A | 83 |
| Max. no. of lum. On circuit break. C10 A | 70 |
| Max. no. of lum. On circuit break. C16 A | 112 |
| Battery | Li-ion |
| Dimmable mode | No |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | PROFESSIONAL 5 Years<br>Battery 3 Years |
| Israeli Standard | Ta=40°C<br>IS 20-1<br>IS 20-2-1<br>IS 20-2-22 |
| CB | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-7<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | √ |
| IP 60529 | IP65 |
| Protection class IK 62262 (shock resistance) | IK08 |
| Green Building | ISO 14001 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Indoor<br>Outdoor |
| Mounting type | Surface |
| Mounting location | Ceiling<br>Wall |
| Type of protection | IP65 |
| Ambient temperature range | 0...+40°C |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 120Lm/W |
| Luminous flux | 3950/460Lm |
| CCT | 5700K |
| CRI | >80 |
| LED manufacturer | EVERLIGHT |
| Chip type | SMD 2835 |
| Beam angle | 120° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ