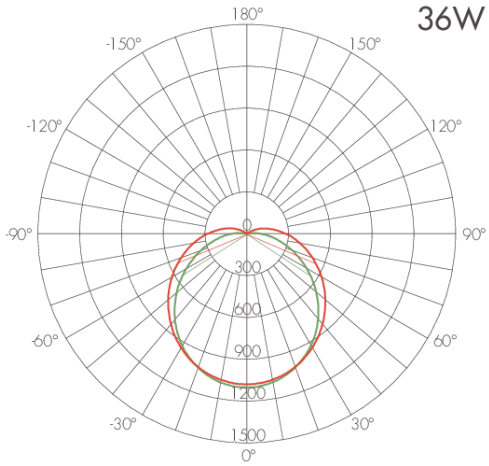
# הרמטי אפור SPEED LED PLUS 34W
# IP65 אור ניטרלי







סדרת גופי תאורת לד לינאריים הרמטיים ביעילות אורית 110Lm/w ודרגת אטימות IP65. התקנה נוחה ע"י פתיחת תא מהדקים אחורי כצמוד קיר/תקרה בעזרת קליפסים. בגוף מותקנים ומחווטים 2 אנטיגרונים - אחד בכל צד, המאפשרים שרשור לגוף הבא תוך שמירה על אטימות. מיועדים להארת חניונים, מסדרונות, מחסנים, תעשייה, מבני ציבור ועוד.

מק"ט - 71333640

דגם - LG06A-H-12-36

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK08
- IP65
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות



# DIMENSIONS & WEIGHT

| | |
|---|---|
| Width | 86mm |
| Length | 1180mm |
| Height | 66mm |
| Product weight | 1220g |

# MATERIALS & COLORS

| | |
|---|---|
| Cable surface [mm2] | gray |
| Protection class IEC 62262 | PC |
| Cover finishing | IK08 |
| Cover material | milky |
| Lens material | PC |

# ELECTRICAL DATA

| | |
|---|---|
| Nominal wattage | 34W |
| Nominal current | 0.15A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 2 |
| Operating mode | Internal LED driver |
| Driver manufacturer | TRIDONIC |
| Driver model | LC 35/300/121 fixC lp SNC2 |
| Driver output current | 300mA |
| Power factor | >0.95 |
| THDi | <15% |
| Output ripple current | ≤5% |
| Inrush current | 5.5A |
| Inrush current time $T_{h50}$ | 20µs |
| Max. no. of lum. On circuit break. B10 A | 41 |
| Max. no. of lum. On circuit break. B16 A | 65 |
| Max. no. of lum. On circuit break. C10 A | 41 |
| Max. no. of lum. On circuit break. C16 A | 65 |
| Dimmable mode | No |

# CERTIFICATES & STANDARDS

| | |
|---|---|
| Nisko Class | PROFESSIONAL 5 Years |
| Israeli Standard | Ta=35°C<br>IS 20-1<br>IS 20-2-1 |
| CB | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | ✓ |
| TM21 | √ Ta=35°C |
| LM79 | ✓ |
| IP 60529 | IP65 |
| Protection class IK 62262 (shock resistance) | IK08 |
| Green Building | ISO 14001 |
| ISO 9001 | ✓ |
| אישורים נוספים | √ פיקוד העורף<br>√ מבחן הרס ת"י 5103-4<br>√ משרד הביטחון |

# APPLICATION & MOUNTING

| | |
|---|---|
| Ambient temperature range | 4...+35°C |

# PERFORMANCE

| | |
|---|---|
| Lifespan (Hr) | 50000Hrs |
| TM21 | √ Ta=35°C |
| Lifespan L70 | >60000Hrs |
| Lifespan L80 | >55000Hrs |
| Lifespan L90 | >28000Hrs |
| Driver lifespan | 50000Hrs |

# PHOTOMETRIC DATA

| | |
|---|---|
| Luminous efficacy | 109Lm/W |
| Luminous flux | 3700Lm |
| CCT | 4000K |
| CRI | >80 |
| LED manufacturer | EVERLIGHT |
| Chip type | SMD 2835 |
| Beam angle | 120° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין