
הרמטי אפור SPEED LED PLUS 34W IP65 אור ניטרלי




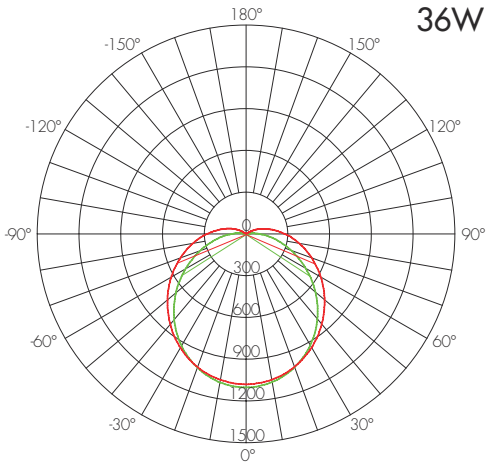

סדרת גופי תאורת לד לינאריים הרמטיים ביעילות אורית 110Lm/w ודרגת אטימות IP65. התקנה נוחה ע"י פתיחת תא מהדקים אחורי כצמוד קיר/תקרה בעזרת קליפסים. בגוף מותקנים ומחווטים 2 אנטיגרונים - אחד בכל צד, המאפשרים שרשור לגוף הבא תוך שמירה על אטימות. מיועדים להארת חניונים, מסדרונות, מחסנים, תעשייה, מבני ציבור ועוד.

מק"ט - 71333640
דגם - LG06A-H-12-36
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי



DIMENSIONS & WEIGHT	מידות ומשקל
Width	86mm
Length	1180mm
Height	66mm
Product weight	1220g

MATERIALS & COLORS	מבנה וגימור
Product color	gray
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	34W
Nominal current	0.15A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	TRIDONIC
Driver model	LC 35/300/121 fixC lp SNC2
Driver output current	300mA
Power factor	>0.95
THDi	<15%
Output ripple current	≤5%
Inrush current	5.5A
Inrush current time T_{h50}	20µs
Max. no. of lum. On circuit break. B10 A	41
Max. no. of lum. On circuit break. B16 A	65
Max. no. of lum. On circuit break. C10 A	41
Max. no. of lum. On circuit break. C16 A	65
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	√
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4 √ משרד הביטחון

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface
Mounting location	Ceiling Wall
Type of protection	IP65
Ambient temperature range	4...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>55000Hrs
Lifespan L90	>28000Hrs
Driver lifespan	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	109Lm/W
Luminous flux	3700Lm
CCT	4000K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >