הרמטי לד אפור SPEED LED PLUS 45W
IP65 אור ניטרלי



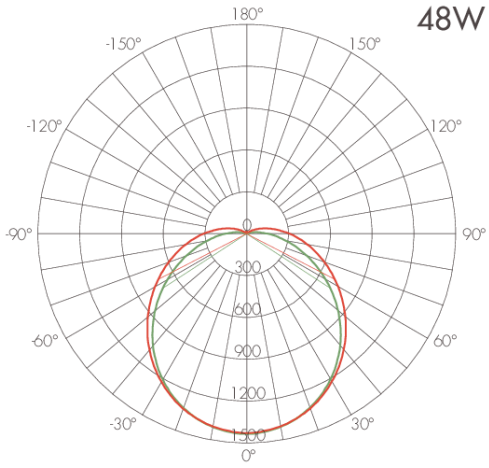

סדרת גופי תאורת לד לינאריים הרמטיים ביעילות אורית 110Lm/w ודרגת אטימות IP65. התקנה נוחה ע"י פתיחת תא מהדקים אחורי כצמוד קיר/תקרה בעזרת קליפסים. בגוף מותקנים ומחווטים 2 אנטיגרונים - אחד בכל צד, המאפשרים שרשור לגוף הבא תוך שמירה על אטימות. מיועדים להארת חניונים, מסדרונות, מחסנים, תעשייה, מבני ציבור ועוד.

מק"ט - 71334840

דגם - LG06A-H-15-48

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK08
- IP65
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות



DIMENSIONS & WEIGHT

Width	86mm
Length	1480mm
Height	72mm
Product weight	1770g

MATERIALS & COLORS

Cable surface [mm2]	gray
Protection class IEC 62262	PC
Cover finishing	IK08
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	45W
Nominal current	0.20A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	TRIDONIC
Driver model	LC 50/300/170 fixC lp SNC2
Driver output current	300mA
Power factor	>0.95
THDi	<9%
Output ripple current	≤5%
Inrush current	15A
Inrush current time T_{h50}	100µs
Max. no. of lum. On circuit break. B10 A	30
Max. no. of lum. On circuit break. B16 A	48
Max. no. of lum. On circuit break. C10 A	30
Max. no. of lum. On circuit break. C16 A	48
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
TM21	√ Ta=35°C
LM79	✓
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
Green Building	ISO 14001
ISO 9001	✓
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4 √ משרד הביטחון

APPLICATION & MOUNTING

Ambient temperature range	4...+35°C

PERFORMANCE

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>54000Hrs
Lifespan L90	>27000Hrs
Driver lifespan	50000Hrs

PHOTOMETRIC DATA

Luminous efficacy	109Lm/W
Luminous flux	4900Lm
CCT	4000K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	120°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין