
# צמוד קיר לבן LOTUS-V 3W IP65 3CCT




סדרת גופי תאורת לד צמודי קיר בדרגת אטימות IP65. עיצוב דק, חדיש וקומפקטי.
כולל שיטה ייחודית לבחירת גוון אור על ידי לחיצת כפתור. חסכוני בצריכת חשמל
ותחזוקה. להתקנה על חומות, מעברים, כניסות לחניונים ועוד.

מק"ט - 71461226
דגם - 2004-3W WHITE
קישור לדף מוצר ואביזרים נלווים באתר

2 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP65 | מתאים לדרישות התקן הישראלי

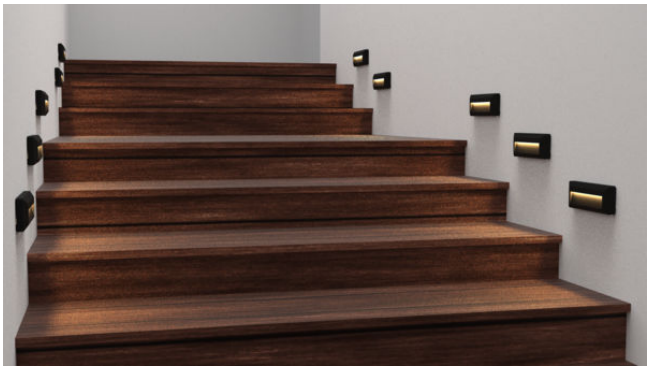

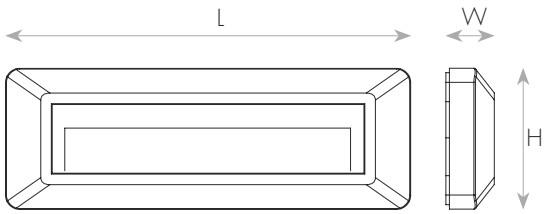


| DIMENSIONS & WEIGHT | מידות ומשקל |
|---|---|
| Width | 230mm |
| Length | 28mm |
| Height | 80mm |
| Product weight | 280g |

| MATERIALS & COLORS | מבנה וגימור |
|---|---|
| Product color | white |
| Body material | PC |
| Cover finishing | milky |
| Cover material | PC |

## ELECTRICAL DATA נתונים חשמליים

| | |
|---|---|
| Nominal wattage | 1.9W |
| Nominal current | 0.01A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 2 |
| Operating mode | Internal LED driver |
| Driver manufacturer | Integrated |
| Dimmable driver mode | No |

## CERTIFICATES & STANDARDS תקנים

| | |
|---|---|
| Nisko Class | VALUE 2 Years |
| Israeli Standard | Ta=25°C<br>IS 20-1<br>IS 20-2-1 |
| CB | IEC 60598-1<br>IEC 60598-2-1<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 RG0 (Exempt) |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| IP 60529 | IP65 |
| ISO 9001 | √ |

## APPLICATION & MOUNTING יישומים

| | |
|---|---|
| Application environment | Outdoor |
| Mounting type | Surface |
| Mounting location | Wall |
| Type of protection | IP65 |
| Ambient temperature range | -20...+40°C |

## PERFORMANCE ביצועים

| | |
|---|---|
| Lifespan (Hr) | 15000Hrs |

## PHOTOMETRIC DATA אופטיקה

| | |
|---|---|
| Luminous efficacy | 26Lm/W |
| Luminous flux | 50/50/50Lm |
| CCT | 3000/4000/6500K |
| CRI | >80 |
| LED manufacturer | GLORY SKY |
| Chip type | SMD 2835 |
| Beam angle | 70° |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ