צמוד קיר/חומה 3CCT אפור גרניט CASA
GN2 60W IP65



גוף לד צמוד קיר/חומה בדרגת אטימות גבוהה IP65. הדור השני מסדרת CASA בעיצוב קלאסי, חסכוני בצריכת החשמל ובתחזוקה. אפשרות בחירת 3 גווני אור: חם-ניטרלי-קר ע"י מפסק בקופסת החיבורים. הספק מרשים לשטף אור יעיל במיוחד, כיסוי אופטי חלבי והתקנה נוחה וקלה. מיועד להארת היקפי מבנה, קירות, מרפסות, פרגולות, מבואות ועוד.

מק"ט - 71462316

דגם - YT-NP-WP17-60W

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK08
- IP65
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- 3 שנות אחריות

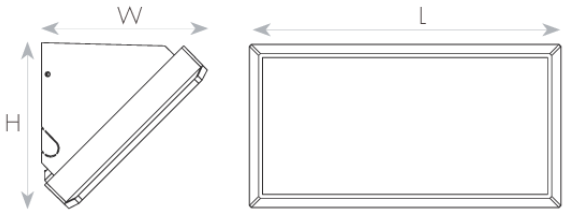



DIMENSIONS & WEIGHT

Width	330mm
Length	140mm
Height	138mm
Product weight	990g

MATERIALS & COLORS

Cable surface [mm2]	Granite gray
Protection class IEC 62262	PC
Cover finishing	IK08
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	60W
Nominal current	0.26A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.96
THDi	<10%
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	ECO 3 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-25...+40°C

PERFORMANCE

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

Luminous efficacy	90Lm/W
Luminous flux	5400Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 > מודיעין 41, המעיין > קבוצת ניסקו בע"מ