צמוד קיר/חומה 3CCT אפור גרניט CASA
GN2 60W IP65



גוף לד צמוד קיר/חומה בדרגת אטימות גבוהה IP65. הדור השני מסדרת CASA בעיצוב קלאסי, חסכוני בצריכת החשמל ובתחזוקה. אפשרות בחירת 3 גווני אור: חם-ניטרלי-קר ע"י מפסק בקופסת החיבורים. הספק מרשים לשטף אור יעיל במיוחד, כיסוי אופטי חלבי והתקנה נוחה וקלה. מיועד להארת היקפי מבנה, קירות, מרפסות, פרגולות, מבואות ועוד.

מק"ט - 71462316
דגם - YT-NP-WP17-60W
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

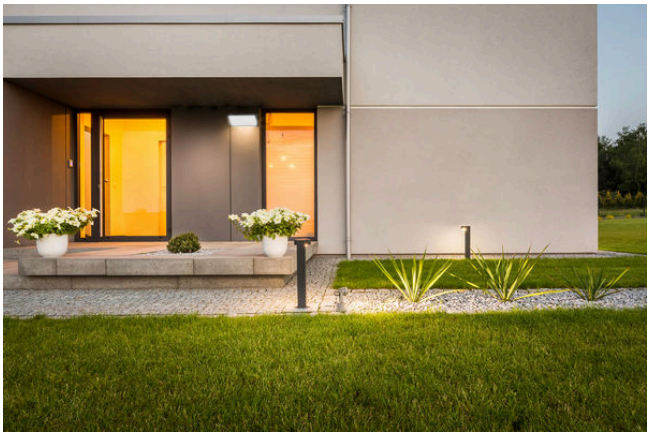

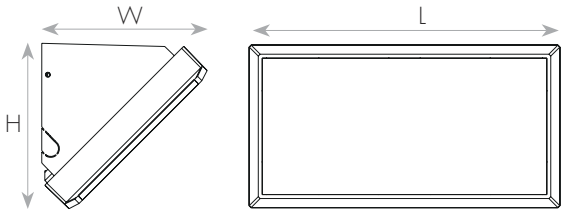

DIMENSIONS & WEIGHT	מידות ומשקל
Width	330mm
Length	140mm
Height	138mm
Product weight	990g

MATERIALS & COLORS	מבנה וגימור
Product color	Granite gray
Body material	PC
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	60W
Nominal current	0.26A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.96
THDi	<10%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	ECO 3 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-25...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	90Lm/W
Luminous flux	5400Lm
CCT	3000/4000/6000K
CRI	>80
LED manufacturer	MLS
Chip type	SMD 2835
Beam angle	120°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ