
צמוד קיר גרניט VERDE 20/30/40W IP65 אור חם




גוף תאורה צמוד קיר/חומה, חכם וגמיש, בעל מקדם מסירת צבע גבוה CRI>90. מאפשר לבחור את ההספק (20/30/40W) ואת גוון האור (2200/2700/3000K) בלחיצת כפתור! דרגת אטימות IP65 ויעילות אורית מרשימה ביותר. דרייבר איכותי המבטיח עשרות אלפי שעות עבודה וחיסכון משמעותי בצריכת החשמל. חיווט והתקנה יעילה ומהירה ללא צורך בפתיחת גוף התאורה וללא פגיעה באטימות. שימוש באנטיגרון ייעודי בחלקו האחורי של גוף התאורה. פתרון מושלם להארת קירות, היקפי מבנים, מעברים, שבילים, כניסות לחניונים ועוד.

מק"ט - 71462402
דגם - YT-WP14-40W-22/27/30K90-G
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK10 | מתאים לדרישות התקן הישראלי

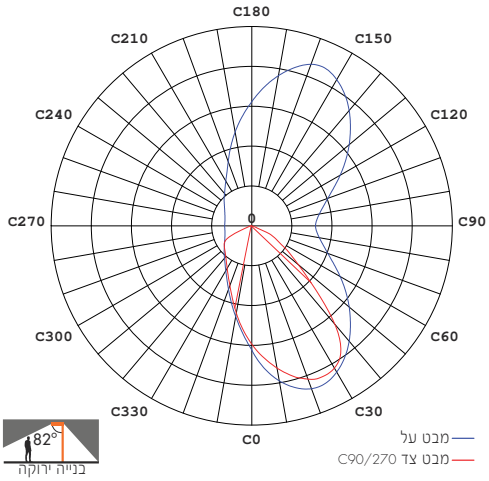

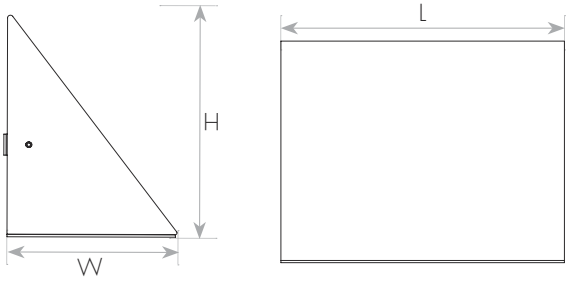



DIMENSIONS & WEIGHT — מידות ומשקל

Width	153mm
Length	250mm
Height	210mm
Product weight	1640g

MATERIALS & COLORS — מבנה וגימור

Product color	Granite gray
Body material	aluminum
Protection class IEC 62262	IK10
Cover finishing	milky
Cover material	PC
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	20/30/40W
Nominal current	0.1/0.14/0.18A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Driver output current	95mA
Power factor	>0.98
THDi	<20%
Output ripple current	≤6%
Inrush current	26A
Inrush current time T_{h50}	175µs
Max. no. of lum. On circuit break. B10 A	20
Max. no. of lum. On circuit break. B16 A	33
Max. no. of lum. On circuit break. C10 A	32
Max. no. of lum. On circuit break. C16 A	54
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG1 IEC 62778 RG0 (1m)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
Flicker IEEE 1789	√
LM80	√
TM21	√ Ta=35°C
LM79	√
Binning	√ Declaration SDCM ≤ 5
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK10
Green Building	√
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP65
Ambient temperature range	-20...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>102000Hrs
Lifespan L80	>102000Hrs
Lifespan L90	>50000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	110Lm/W
Luminous flux	4400Lm
CCT	2200/2700/3000K
CRI	>90
LED manufacturer	SMALITE
Chip type	SMD 2835
Beam angle	130X60°
BUG Rating	B1-U0-G1
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >