
צמוד קיר אפור כהה CUBA-1 LUTEC 12W IP54 אור חם





גוף תאורה צמוד קיר של חברת LUTEC מבית ניסקו. גוף התאורה CUBA זוכה פרס העיצוב Reddot Design Award בעיצוב מודרני וורסטילי. מתאים לבחירה כהתקנה אנכית או אופקית. מגיע בתצורה של ראש כפול או בודד. ניתן לכוון את ראש התאורה בכיוון ובסיבוב של 350°, מה שיוצר אפשרויות מגוונות של הארה עילית, תחתית או צידית, לצד אפקט הארה קסום. גוף אלומיניום בשילוב עדשת פוליקרבונט חלבית בגוון אור חם. התקנה נוחה וקלה. להארה בהיקפי מבנה, כניסות, מרפסות, מבואות, חללים גדולים ועוד.

מק"ט - 71510002
דגם - 5193803118
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP54 | מתאים לדרישות התקן הישראלי

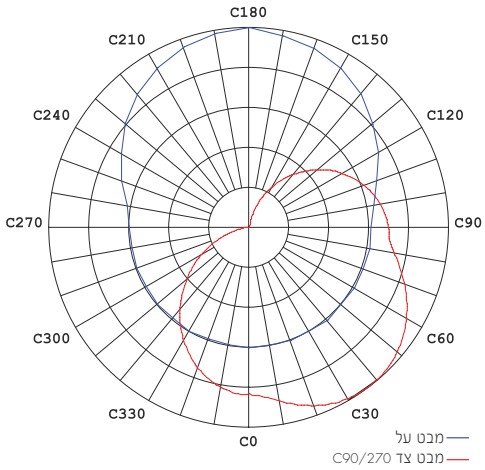



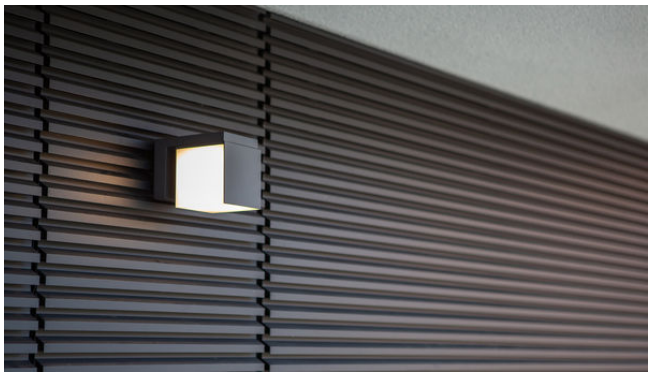

DIMENSIONS & WEIGHT	מידות ומשקל
Width	100mm
Length	116mm
Height	148mm
Product weight	1030g

MATERIALS & COLORS	מבנה וגימור
Product color	dark gray
Body material	aluminum
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	12W
Nominal current	0.05A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	Integrated
Power factor	>0.70
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 5 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
CE	IEC 60598-1 IEC 60598-2-1 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP54
Green Building	ISO 14001

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP54
Ambient temperature range	-20...+50°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	46Lm/W
Luminous flux	550Lm
CCT	3000K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	99°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ