
צמוד קיר אפור כהה GEMINI-MEDIUM
אור חם UP&DOWN LUTEC 21W IP54




סדרת גופי תאורה צמודי קיר של חברת LUTEC מבית ניסקו. גוף תאורה בעיצוב מינימלי ונקי עם עוצמה אורית גבוהה. מתאים כתאורת פנים וחוץ לכל חלל! להארה ולכיסוי שטחים בשני כיוונים - אפ אנד דאון. מבנה אלומיניום בשילוב עדשת זכוכית שקופה. התקנה נוחה וקלה. להארת היקפי מבנה, כניסות, מבואות, חללים גדולים ועוד.

מק"ט - 71510030
דגם - 5189112118
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP54 | מתאים לדרישות התקן הישראלי

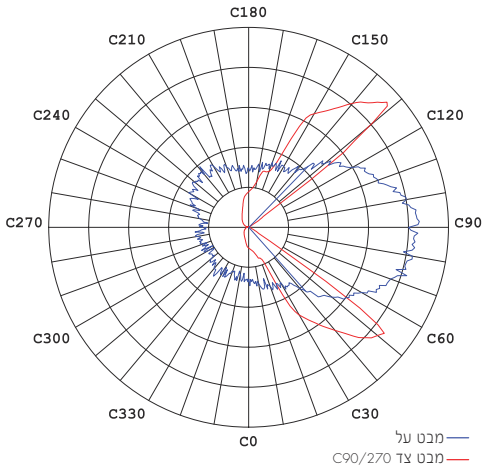



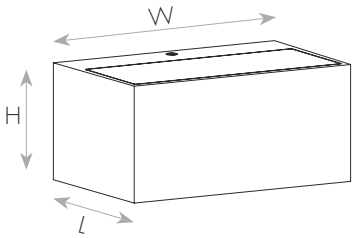

DIMENSIONS & WEIGHT	מידות ומשקל
Width	220mm
Length	103mm
Height	85mm
Product weight	1100g

MATERIALS & COLORS	מבנה וגימור
Product color	dark gray
Body material	aluminum
Cover finishing	Clear
Cover material	glass
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	20W
Nominal current	0.11A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Power factor	>0.76
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 5 Years
Israeli Standard	Ta=25°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
CE	IEC 60598-1 IEC 60598-2-1 IEC 61347-2-11 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP54
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Surface
Mounting location	Wall
Type of protection	IP54
Ambient temperature range	-20...+50°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	73Lm/W
Luminous flux	1450Lm
CCT	3000K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	130°
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >