שקוע Trimless לבן CONIX 10W 45mm 3CCT




סדרת גופי תאורה שקועים בקו אפס (Trimless) למראה אלגנטי והרמוני עם התקרה. התקנה נוחה ומהירה בשיטת Click, עם מסגרת עגולה ומנגנון נשלף, לגישה קלה גם לאחר ההתקנה. עיצוב מינימליסטי המשלב אסתטיקה ודיוק הנדסי, עם אפשרות לבחירת גוון אור 3000K / 4000K / 6000K ליצירת האווירה הרצויה בכל חלל. ניתן להזמין מקדחה ייעודית לחיתוך מדויק (נמכרת בנפרד). מתאים לבתי מגורים, חללי עבודה ושטחים ציבוריים.


מק"ט - 71608034


דגם - 35045AS 10W CUT45 3CCT CRI90 38D WH

קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP40 | מתאים לדרישות התקן הישראלי

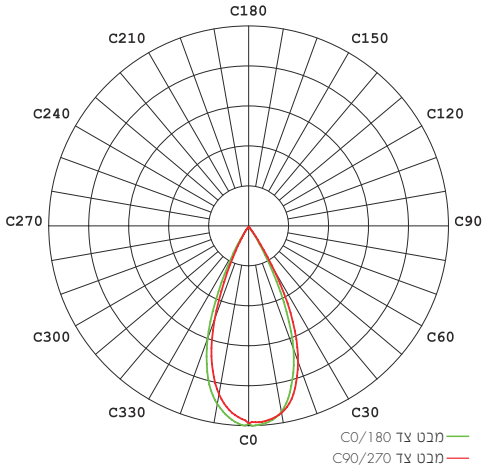



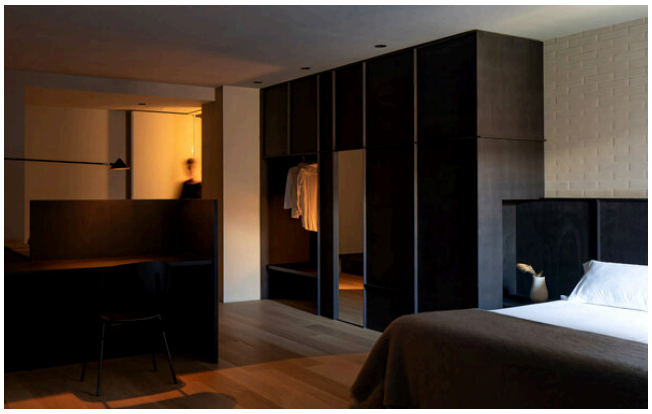

DIMENSIONS & WEIGHT — מידות ומשקל

Height	68mm
Diameter	70mm
Product weight	170g
Cut hole diameter	45mm

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	aluminum
Cover finishing	Clear
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	10W
Nominal current	0.07A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-012S0250H
Driver output current	250mA
Power factor	>0.59
Output ripple current	≤5%
Inrush current	20A
Inrush current time T_{h50}	60µs
Max. no. of lum. On circuit break. B10 A	59
Max. no. of lum. On circuit break. B16 A	94
Max. no. of lum. On circuit break. C10 A	59
Max. no. of lum. On circuit break. C16 A	94
Dimmable mode	ON/OFF dimmable optional
Optional driver 1-10V	LF 17900216 LF 17900217
Optional driver DALI	LF 17900251
Optional driver TRIAC	LF 17900031 LF 17900032

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-2
CE	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP40
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	-10...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	80Lm/W
Luminous flux	800Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	Greatshine
Chip type	COB
Beam angle	38°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ