
שקוע Trimless שחור CONIX 15W 55mm 3CCT




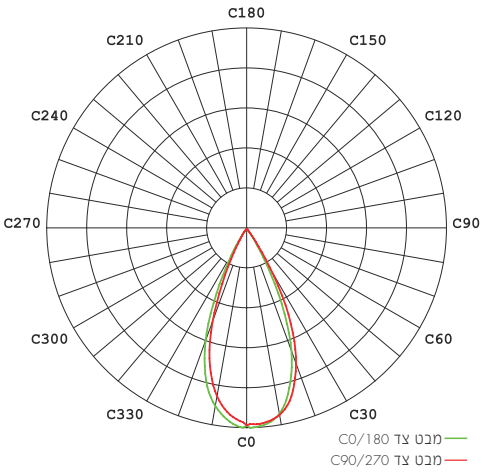


סדרת גופי תאורה שקועים בקו אפס (Trimless) למראה אלגנטי והרמוני עם התקרה. התקנה נוחה ומהירה בשיטת Click, עם מסגרת עגולה ומנגנון נשלף לגישה קלה גם לאחר ההתקנה. עיצוב מינימליסטי המשלב אסתטיקה ודיוק הנדסי, עם אפשרות לבחירת גוון אור 3000K / 4000K / 6000K ליצירת האווירה הרצויה בכל חלל. ניתן להזמין מקדחה ייעודית לחיתוך מדויק (נמכרת בנפרד). מתאים לבתי מגורים, חללי עבודה ושטחים ציבוריים.

מק"ט - 71608037
דגם - 7731W 15W CUT55 3CCT CRI90 38D BK
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP40 | מתאים לדרישות התקן הישראלי



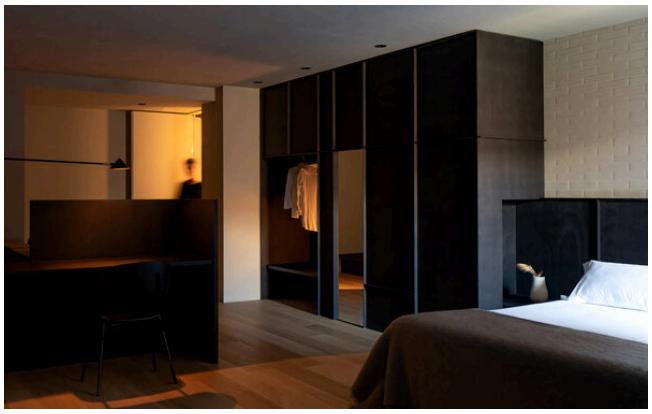

DIMENSIONS & WEIGHT — מידות ומשקל

Height	92mm
Diameter	90mm
Product weight	318g
Cut hole diameter	55mm

MATERIALS & COLORS — מבנה וגימור

Product color	black
Body material	aluminum
Cover finishing	Clear
Lens material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	13W
Nominal current	0.11A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIR013YS0350H
Driver output current	350mA
Power factor	>0.56
Output ripple current	≤8%
Inrush current	9A
Inrush current time T_{h50}	120µs
Max. no. of lum. On circuit break. B10 A	30
Max. no. of lum. On circuit break. B16 A	50
Max. no. of lum. On circuit break. C10 A	60
Max. no. of lum. On circuit break. C16 A	90
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900102
Optional driver 1-10V	LF 17900216 LF 17900217
Optional driver DALI	LF 17900250 LF 17900251
Optional driver TRIAC	LF 17900033

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-2
CE	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP40
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP40
Ambient temperature range	-10...+35°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	81Lm/W
Luminous flux	1050Lm
CCT	3000/4000/6000K
CRI	>90
LED manufacturer	Greatshine
Chip type	COB
Beam angle	38°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ