
שקוע תקרה כרום SOLY 5W 35mm 3CCT





שקוע לד DARKLIGHT עם שוליים דקים במיוחד. ספוט קומפקטי בזווית מדויקת של 38° המונע סנוור ומאיר בצורה איכותית ומדויקת. תאורה אפקטיבית המשלבת איכות אורית גבוהה CRI>90, ומעניקה הארה טבעית. דרייבר חיצוני ללא ריצוד. מתאים למגוון רחב של יישומים, להארת מסדרונות, חדרי מגורים, גלריות, מוזיאונים, בתי מלון ועוד.

מק"ט - 71810047
דגם - 2905R Spot Light 5W CUT35 38D 3CCT CHROME
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי

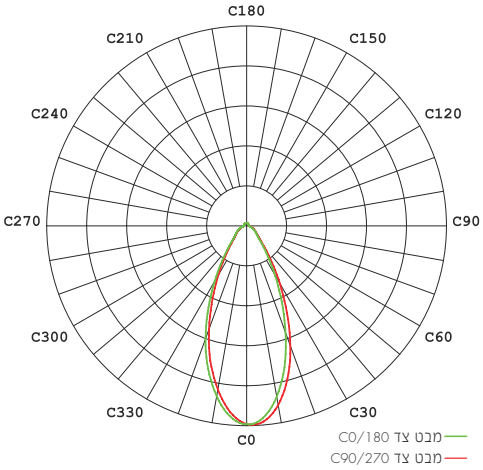



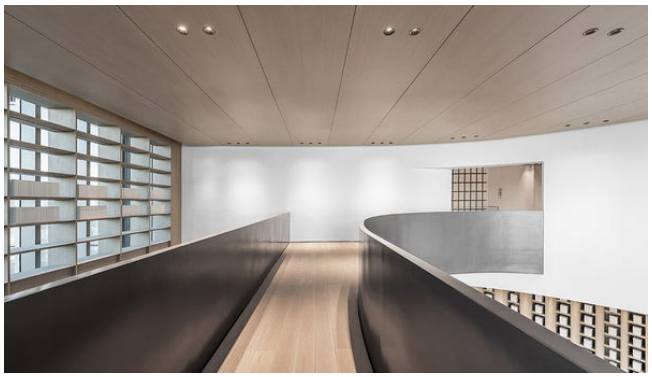

DIMENSIONS & WEIGHT — מידות ומשקל

Height	58mm
Diameter	40mm
Product weight	595g
Cut hole diameter	35mm

MATERIALS & COLORS — מבנה וגימור

Product color	chrom
Body material	aluminum
Cover finishing	Clear
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	5.3W
Nominal current	0.04A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-008S0135H
Driver output current	135mA
Power factor	>0.55
THDi	<9%
Output ripple current	≤5%
Inrush current	15A
Inrush current time T_{h50}	60µs
Max. no. of lum. On circuit break. B10 A	82
Max. no. of lum. On circuit break. B16 A	131
Max. no. of lum. On circuit break. C10 A	136
Max. no. of lum. On circuit break. C16 A	222
Dimmable mode	ON/OFF dimmable optional
Optional driver 1-10V	LF 17900216
Optional driver TRIAC	LF 17900031

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=35°C IS 20-1 IS 20-2-2
CE	IEC 60598-1 IEC 60598-2-2 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62493
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
IP 60529	IP20
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-10...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	30000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	113Lm/W
Luminous flux	600(4K)Lm
CCT	3000/4000/6000K
CRI	>90
Beam angle	38°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ < המעיין 41, מודיעין