שקוע תקרה לבן HONEY 5W 50mm אור חם



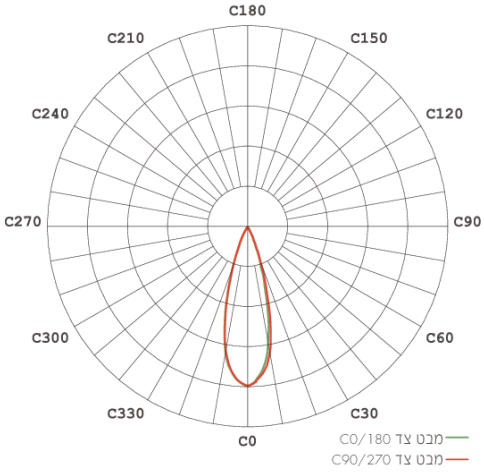

סדרת שקועי תקרה עם שוליים דקורטיבים ודקים ועדשה ייחודית HONEYCOMB להארה עדינה וחמימה. מקדם מסירת צבע גבוה CRI>90 המבטיח תאורה איכותית וטבעית. מאיר בזווית הארה ממוקדת 38° למניעת סנוור וכולל דרייבר חיצוני ללא ריצוד. אופציה לעמעום במגוון שיטות בהתאם לדף הקטלוג. להארה במגוון יישומים, מסדרונות, חדרי מגורים, גלריות, מוזיאונים, בתי מלון ועוד.

מק"ט - 71820001

דגם - D2041-5W 3000K WHITE

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות



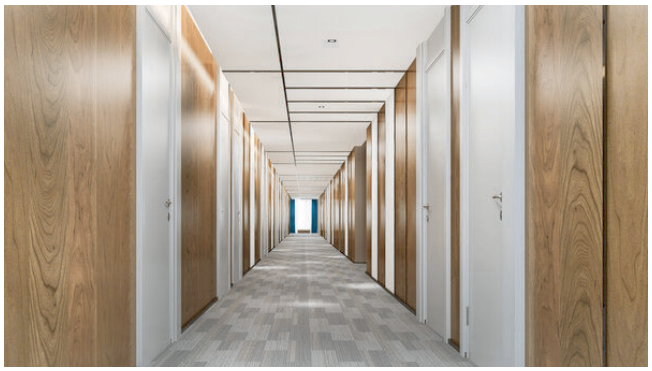

DIMENSIONS & WEIGHT

Height	44mm
Diameter	60mm
Product weight	130g
Cut hole diameter	50mm

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	aluminum
Cover material	Clear
Lens material	PC

ELECTRICAL DATA

Nominal wattage	5W
Nominal current	0.02A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF015YA0100H
Driver output current	100mA
Power factor	>0.90
THDi	<20%
Output ripple current	≤1%
Inrush current	60A
Inrush current time T_{h50}	350µs
Max. no. of lum. On circuit break. B10 A	75
Max. no. of lum. On circuit break. B16 A	120
Max. no. of lum. On circuit break. C10 A	124
Max. no. of lum. On circuit break. C16 A	204
Dimmable mode	ON/OFF dimmable optional
Optional driver 1-10V	LF 17900216
Optional driver TRIAC	LF 17900031

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
CB	IEC 62031
Photobiological Safety	IEC 62471 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	-10...+40°C

PERFORMANCE

Lifespan (Hr)	50000Hrs

PHOTOMETRIC DATA

Luminous efficacy	40Lm/W
Luminous flux	200Lm
CCT	3000K
CRI	>95
LED manufacturer	CREE
Chip type	COB
Beam angle	38°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 > קבוצת ניסקו בע"מ > המעיין 41, מודיעין >