
# שקוע תקרה לבן HONEY 7W 60mm אור חם



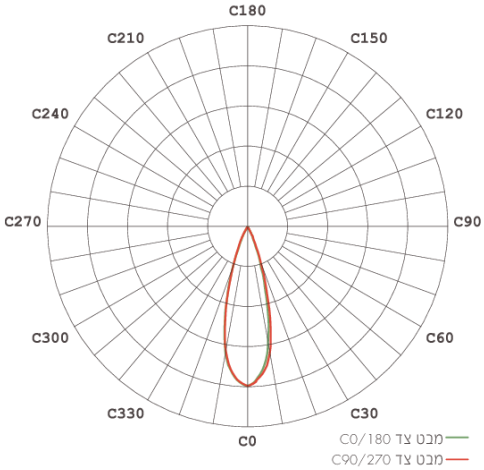


סדרת שקועי תקרה עם שוליים דקורטיבים ודקים ועדשה ייחודית HONEYCOMB להארה עדינה וחמימה. מקדם מסירת צבע גבוה CRI>90 המבטיח תאורה איכותית וטבעית. מאיר בזווית הארה ממוקדת 38° למניעת סנוור וכולל דרייבר חיצוני ללא ריצוד. אופציה לעמעום במגוון שיטות בהתאם לדף הקטלוג. להארה במגוון יישומים, מסדרונות, חדרי מגורים, גלריות, מוזיאונים, בתי מלון ועוד.


מק"ט - 71820002

דגם - D2041-7W 3000K WHITE

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות





## DIMENSIONS & WEIGHT

| | |
|---|---|
| Height | 48mm |
| Diameter | 70mm |
| Product weight | 240g |
| Cut hole diameter | 60mm |

## MATERIALS & COLORS

| | |
|---|---|
| Cable surface [mm2] | white |
| Protection class IEC 62262 | aluminum |
| Cover material | Clear |
| Lens material | PC |

# ELECTRICAL DATA

| | |
|---|---|
| Nominal wattage | 7W |
| Nominal current | 0.03A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 2 |
| Operating mode | External LED driver |
| Driver manufacturer | LIFUD |
| Driver model | LF-GIF015YA0180H |
| Driver output current | 180mA |
| Power factor | >0.90 |
| THDi | <20% |
| Output ripple current | ≤1% |
| Inrush current | 60A |
| Inrush current time $T_{h50}$ | 350µs |
| Max. no. of lum. On circuit break. B10 A | 75 |
| Max. no. of lum. On circuit break. B16 A | 120 |
| Max. no. of lum. On circuit break. C10 A | 124 |
| Max. no. of lum. On circuit break. C16 A | 204 |
| Dimmable mode | ON/OFF dimmable optional |
| Optional driver 1-10V | LF 17900216 |
| Optional driver DALI | LF 17900250 |
| Optional driver TRIAC | LF 17900031 |

# CERTIFICATES & STANDARDS

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=40°C<br>IS 20-1<br>IS 20-2-2 |
| CB | IEC 62031 |
| Photobiological Safety | IEC 62471 RG1 |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| IP 60529 | IP20 |
| ISO 9001 | ✓ |

# APPLICATION & MOUNTING

| | |
|---|---|
| Ambient temperature range | -10...+40°C |

# PERFORMANCE

| | |
|---|---|
| Lifespan (Hr) | 50000Hrs |

# PHOTOMETRIC DATA

| | |
|---|---|
| Luminous efficacy | 43Lm/W |
| Luminous flux | 300Lm |
| CCT | 3000K |
| CRI | >95 |
| LED manufacturer | CREE |
| Chip type | COB |
| Beam angle | 38° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 > קבוצת ניסקו בע"מ > המעיין 41, מודיעין >