
שקוע תקרה לבן HONEY 10W 70mm אור חם




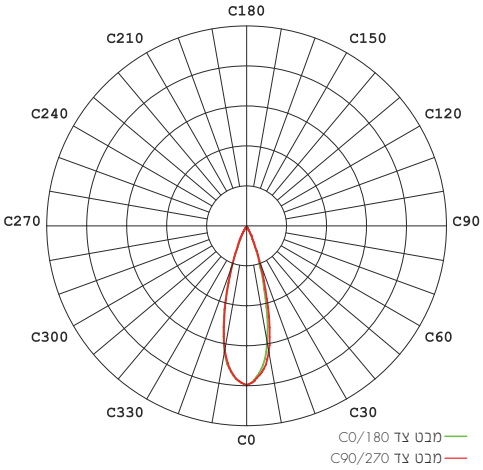


סדרת שקועי תקרה עם שוליים דקורטיבים ודקים ועדשה ייחודית HONEYCOMB להארה עדינה וחמימה. מקדם מסירת צבע גבוה CRI>90 המבטיח תאורה איכותית וטבעית. מאיר בזווית הארה ממוקדת 38° למניעת סנוור וכולל דרייבר חיצוני ללא ריצוד. אופציה לעמעום במגוון שיטות בהתאם לדף הקטלוג. להארה במגוון יישומים, מסדרונות, חדרי מגורים, גלריות, מוזיאונים, בתי מלון ועוד.

מק"ט - 71820003
דגם - D2041-10W 3000K WHITE
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי



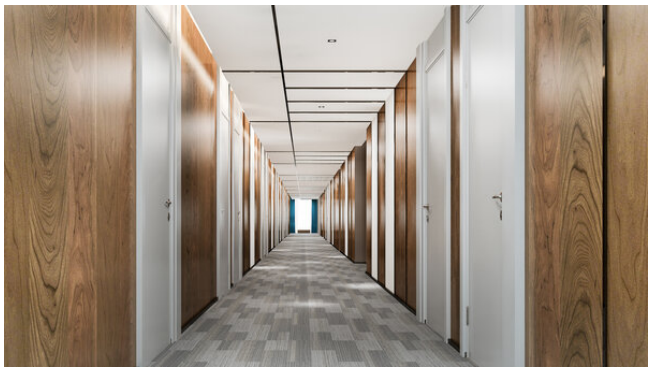

DIMENSIONS & WEIGHT	מידות ומשקל
Height	48mm
Diameter	80mm
Product weight	350g
Cut hole diameter	70mm

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Cover finishing	Clear
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	10W
Nominal current	0.04A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF015YA0250H
Driver output current	250mA
Power factor	>0.90
THDi	<20%
Output ripple current	≤1%
Inrush current	60A
Inrush current time T_{h50}	350µs
Dimmable mode	ON/OFF dimmable optional
Optional driver 1-10V	LF 17900216 LF 17900217
Optional driver DALI	LF 17900251
Optional driver TRIAC	LF 17900031 LF 17900032

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
CB	IEC 62031
Photobiological Safety	IEC 62471 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-10...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs

PHOTOMETRIC DATA

אופטיקה

Luminous efficacy	45Lm/W
Luminous flux	450Lm
CCT	3000K
CRI	>95
LED manufacturer	CREE
Chip type	COB
Beam angle	38°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ