
שקוע תקרה שחור HONEY 7W 60mm אור חם




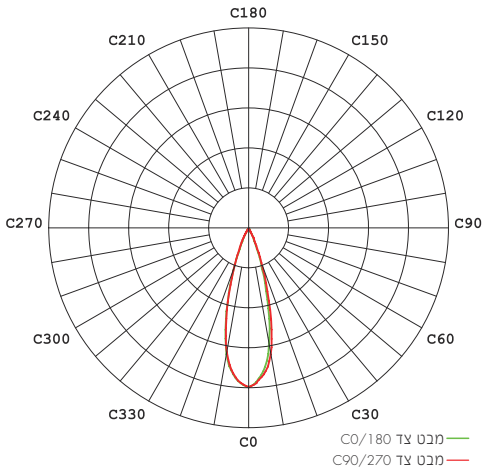


סדרת שקועי תקרה עם שוליים דקורטיבים ודקים ועדשה ייחודית HONEYCOMB להארה עדינה וחמימה. מקדם מסירת צבע גבוה CRI>90 המבטיח תאורה איכותית וטבעית. מאיר בזווית הארה ממוקדת 38° למניעת סנוור וכולל דרייבר חיצוני ללא ריצוד. אופציה לעמעום במגוון שיטות בהתאם לדף הקטלוג. להארה במגוון יישומים, מסדרונות, חדרי מגורים, גלריות, מוזיאונים, בתי מלון ועוד.

מק"ט - 71820005
דגם - D2041-7W 3000K BLACK
קישור לדף מוצר ואביזרים נלווים באתר

3 YEAR GUARANTEE | VALUE | 220-240V 50-60Hz | IP20 | מתאים לדרישות התקן הישראלי



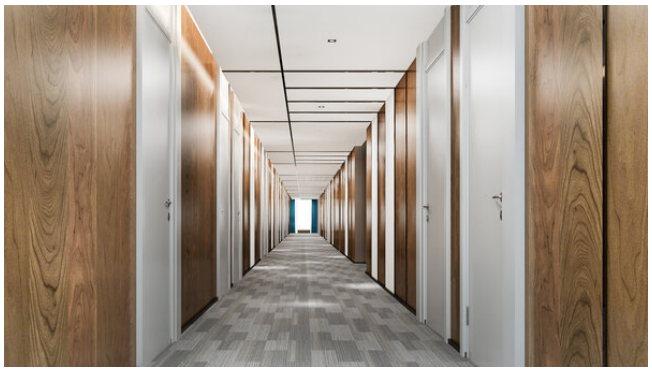

DIMENSIONS & WEIGHT — מידות ומשקל

Height	48mm
Diameter	70mm
Product weight	240g
Cut hole diameter	60mm

MATERIALS & COLORS — מבנה וגימור

Product color	black
Body material	aluminum
Cover finishing	Clear
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	7W
Nominal current	0.03A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIF015YA0180H
Driver output current	180mA
Power factor	>0.90
THDi	<20%
Output ripple current	≤1%
Inrush current	60A
Inrush current time T_{h50}	350µs
Max. no. of lum. On circuit break. B10 A	75
Max. no. of lum. On circuit break. B16 A	120
Max. no. of lum. On circuit break. C10 A	124
Max. no. of lum. On circuit break. C16 A	204
Dimmable mode	ON/OFF dimmable optional
Optional driver 1-10V	LF 17900216
Optional driver DALI	LF 17900250
Optional driver TRIAC	LF 17900031 LF 17900032

CERTIFICATES & STANDARDS תקנים

Nisko Class	VALUE 3 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-2
CB	IEC 62031
Photobiological Safety	IEC 62471 RG1
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
IP 60529	IP20
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Indoor
Mounting type	Recessed
Mounting location	Ceiling
Type of protection	IP20
Ambient temperature range	-10...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	43Lm/W
Luminous flux	300Lm
CCT	3000K
CRI	>95
LED manufacturer	CREE
Chip type	COB
Beam angle	38°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ