
# שקוע תקרה שחור FLAME 10W 90mm
# אור חם



סדרת שקועי תקרה בטכנולוגיה מתקדמת ועיצוב אדריכלי עם יכולת כיוונון של 355°, מאפשר פריסה מדויקת של האור בסביבה. ספוט מצויד בעדשה ייחודית HONEYCOMB להארה עדינה וחמימה ולמניעת סנוור בזווית הארה ממוקדת 38°. איכות אורית גבוהה CRI>90 המבטיחה תאורה איכותית וטבעית. כולל דרייבר חיצוני ללא ריצוד המאפשר התקנה קלה ונוחה. לשימוש במסדרונות, חדרי מגורים, גלריות, מוזיאונים, בתי מלון ועוד.

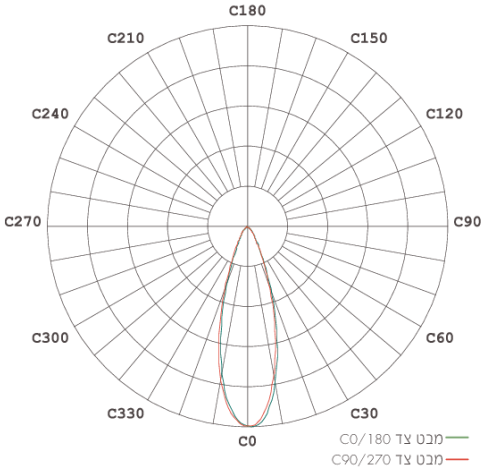



מק"ט - 71820026

דגם - DA8204RR 10W 38° 3000K BLACK

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IP20
- CLASS2
- 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות

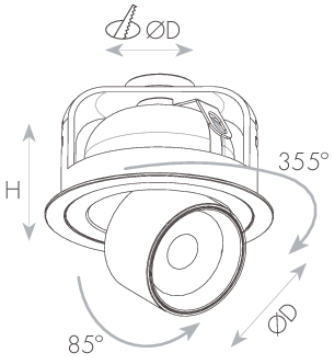




# DIMENSIONS & WEIGHT

| | |
|---|---|
| Height | 70mm |
| Diameter | 95mm |
| Product weight | 350g |
| Cut hole diameter | 90mm |

# MATERIALS & COLORS

| | |
|---|---|
| Cable surface [mm2] | black |
| Protection class IEC 62262 | aluminum |
| Cover material | Clear |
| Lens material | PC |

# ELECTRICAL DATA

| | |
|---|---|
| Nominal wattage | 10W |
| Nominal current | 0.07A |
| Nominal voltage | 220-240V |
| Mains frequency | 50/60Hz |
| Protection class | Class 2 |
| Operating mode | External LED driver |
| Driver manufacturer | EAGLERISE |
| Driver model | LS-8-200 SI ECO |
| Driver output current | 200mA |
| Dimmable driver mode | No |
| Power factor | >0.52 |
| Output ripple current | ≤5% |
| Optional driver ON/OFF | LF 17900100 |
| Optional driver 1-10V | LF 17900216 |
| Optional driver DALI | LF 17900250 |

# CERTIFICATES & STANDARDS

| | |
|---|---|
| Nisko Class | VALUE 3 Years |
| Israeli Standard | Ta=25°C<br>IS 20-1<br>IS 20-2-2 |
| CB | IEC 62031 |
| CE | IEC 60598-1<br>IEC 60598-2-2<br>IEC 61347-1<br>IEC 61347-2-13<br>IEC 62031<br>IEC 62493 |
| Photobiological Safety | IEC 62778 - RG1 |
| EMC | IEC 55015<br>IEC 61000-3-2<br>IEC 61000-3-3<br>IEC 61547 |
| LM80 | ✓ |
| IP 60529 | IP20 |
| ISO 9001 | ✓ |

# APPLICATION & MOUNTING

| | |
|---|---|
| Ambient temperature range | -10...+40°C |

# PERFORMANCE

| | |
|---|---|
| Lifespan (Hr) | 50000Hrs |
| Driver lifespan | 50000Hrs |

# PHOTOMETRIC DATA

| | |
|---|---|
| Luminous efficacy | 80Lm/W |
| Luminous flux | 800Lm |
| CCT | 3000K |
| CRI | >90 |
| LED manufacturer | CREE |
| Chip type | COB |
| Beam angle | 38° |
| CIE class | Direct |
| Efficiency | 100% |


www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >