שקוע תקרה מתכוונן לבן PACO 10W אור ניטרלי



גוף תאורה לד שקוע תקרה, מתכוונן. תחליף חסכוני לגופי תאורה משולבי נורות דקרויקה. רפלקטור אלומיניום, התורם לנצילות אורית גבוהה ביותר. זווית הארה - 36°. מתאים להנמכת גבס סטנדרטית לשימוש במסדרונות, חדרי מגורים, מסעדות, משרדים ועוד.

מק"ט - 72114036

דגם - FR1007 W

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK05
- IP20
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת VALUE
- 3 שנות אחריות

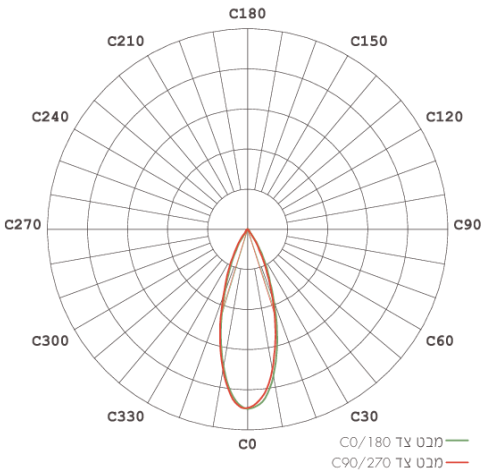





DIMENSIONS & WEIGHT

Height	77mm
Diameter	90mm
Product weight	310g
Cut hole diameter	83mm

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	aluminum
Cover finishing	IK05
Cover material	Clear
Lens material	PMMA

ELECTRICAL DATA

Nominal wattage	10W
Nominal current	0.08A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	External LED driver
Driver manufacturer	LIFUD
Driver model	LF-GIR013YS0250H
Driver output current	220mA
Power factor	>0.55
Output ripple current	≤0.5%
Inrush current	9A
Inrush current time T_{h50}	120µs
Max. no. of lum. On circuit break. B10 A	30
Max. no. of lum. On circuit break. B16 A	50
Max. no. of lum. On circuit break. C10 A	60
Max. no. of lum. On circuit break. C16 A	90
Dimmable mode	ON/OFF dimmable optional
Optional driver ON/OFF	LF 17900100
Optional driver 1-10V	LF 17900216
Optional driver DALI	LF 17900250
Optional driver TRIAC	LF 17900031 LF 17900032

CERTIFICATES & STANDARDS

Nisko Class	VALUE 3 Years
Israeli Standard	IS 20-1 IS 20-2-2
LM80	✓
IP 60529	IP20
Protection class IK 62262 (shock resistance)	IK05
ISO 9001	✓

APPLICATION & MOUNTING

Ambient temperature range	0...+35°C

PERFORMANCE

Lifespan (Hr)	45000Hrs
Driver lifespan	45000Hrs

PHOTOMETRIC DATA

Luminous efficacy	115Lm/W
Luminous flux	1150Lm
CCT	4000K
CRI	>83
LED manufacturer	Bridgelux
Chip type	COB
Beam angle	36°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 > מודיעין 41, המעיין > קבוצת ניסקו בע"מ