
תאורת רחוב אפור MINI TIGER 60W IP66 אור חם




גוף תאורת רחוב מודולרי בעיצוב מרהיב ביעילות אורית גבוהה של כ- 120Lm/W, לצד דרגת אטימות גבוהה ביותר - IP66. עומד בתקנות מחמירות. חיסכון מוכח באנרגיה, תחזוקה והוצאות חשמל. להארת רחובות, שבילים, פארקים, גינות, שצ"פים וכדומה.

מק"ט - 73360301
דגם - EL-SL58-AS
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP66 | IK08 | מתאים לדרישות התקן הישראלי

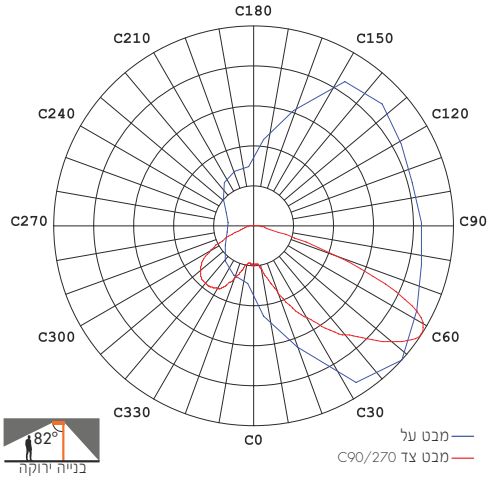

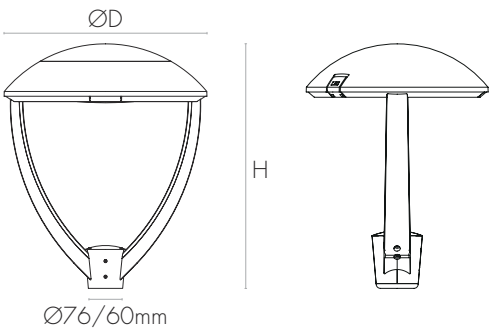



DIMENSIONS & WEIGHT — מידות ומשקל

Height	510mm
Diameter	380mm
Product weight	7000g

MATERIALS & COLORS — מבנה וגימור

Product color	RAL 9023 Gray
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	Clear
Cover material	glass
Lens material	PC

NISKO

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	60W
Nominal current	0.28A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 1
Operating mode	Internal LED driver
Driver manufacturer	INVENTRONICS
Driver model	EUD-075S070BV
Driver output current	700mA
Power factor	>0.97
THDi	<5%
Output ripple current	≤5%
Inrush current time T_{h50}	740µs
Dimmable mode	ON/OFF dimmable optional

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=50°C IS 20-1 IS 20-2-3
CB	IEC 60598-1 IEC 60598-2-3 IEC 61347-1 IEC 61347-2-13 IEC 62031 IEC 62384 IEC 62493
CE	√
International Standards	ENEC
Photobiological Safety	IEC 62471 RG0 (Exempt) IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=40°C
LM79	√
Binning	√ Declaration SDCM ≤ 5
IP 60529	IP66
Protection class IK 62262 (shock resistance)	IK08
Salt Spray Test	IEC 60068-2-52
Vibration Test	ANSI C136.31
Green Building	ISO 14001
ISO 9001	√

APPLICATION & MOUNTING יישומים

Application environment	Outdoor
Mounting type	Pole
Mounting location	Pole
Type of protection	IP66
Ambient temperature range	-30...+45°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=40°C
Lifespan L70	>72000Hrs
Lifespan L80	>72000Hrs
Lifespan L90	>36000Hrs
Driver lifespan	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	117Lm/W
Luminous flux	7050Lm
CCT	3000K
CRI	>70
LED manufacturer	LUMILEDS
Chip type	SMD 3030
SDCM	≤5
Beam angle	145X60°
IES Classification	Type III
Longitudinal Classification	Short
BUG Rating	B2-U0-G1
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ