לינארי לבן IP65 80° TRACK 160W אור ניטרלי



סדרת גופי תאורת לד לינאריים בדרגת אטימות IP65 וביעילות אורית גבוהה 125Lm/w. עדשה אופטית ועדשה אקרילית למניעת סנוור, התקנה קלה ופשוטה בעזרת קליפסים כצמוד תקרה או כגוף תלוי מתכוונן בגבהים של 3-12 מטר. אפשרות שרשור לגוף הבא תוך שמירה על אטימות. פתרון מתקדם עבור מפעלים, מחסנים, מעברים, חנויות, מבני ציבור ואולמות.

מק"ט - 74040160
דגם - HLE-1200
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

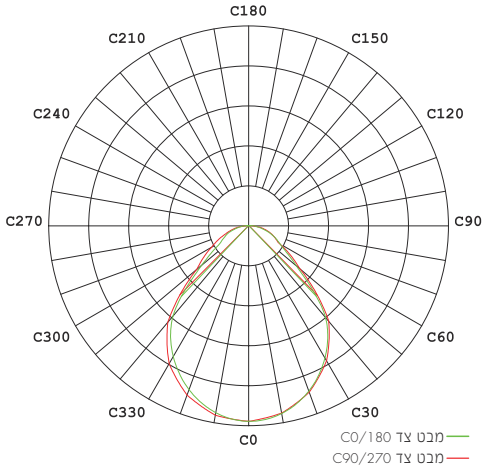

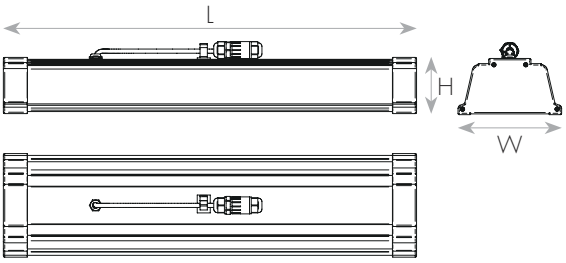



DIMENSIONS & WEIGHT — מידות ומשקל

Width	150.6mm
Length	1224mm
Height	81.7mm
Product weight	3500g

MATERIALS & COLORS — מבנה וגימור

Product color	white
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	150W
Nominal current	0.66A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver output current	520mA
Power factor	>0.99
THDi	<15%
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
LM79	√
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	√
מחירון דקל	88.082.0470

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface/Pendant
Mounting location	Ceiling
Type of protection	IP65
Ambient temperature range	-10...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>34000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	125Lm/W
Luminous flux	18700Lm
CCT	4000K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	80°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < מודיעין 41, המעיין < קבוצת ניסקו בע"מ