

לינארי לבן TRACK 40W 80° IP65 אור קר

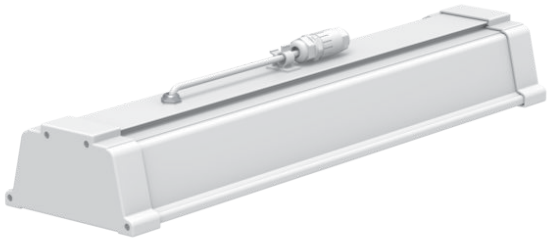

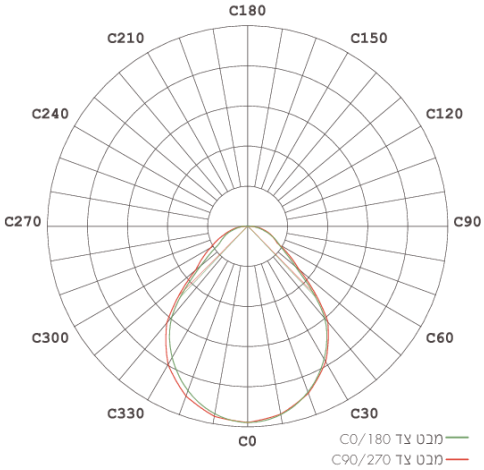


סדרת גופי תאורת לד לינאריים בדרגת אטימות IP65 וביעילות אורית גבוהה 125Lm/w. עדשה אופטית ועדשה אקרילית למניעת סנוור, התקנה קלה ופשוטה בעזרת קליפסים כצמוד תקרה או כגוף תלוי מתכוונן בגבהים של 3-12 מטר. אפשרות שרשור לגוף הבא תוך שמירה על אטימות. פתרון מתקדם עבור מפעלים, מחסנים, מעברים, חנויות, מבני ציבור ואולמות.

מק"ט - 74057140

דגם - HLE130-600

קישור לדף מוצר ואביזרים נלווים באתר

- מתאים לדרישות התקן הישראלי
- IK08
- IP65
- CLASS2
- אייקון של 220-240 וולט 50-60 הרץ
- מוצר בדרגת PRO
- 5 שנות אחריות

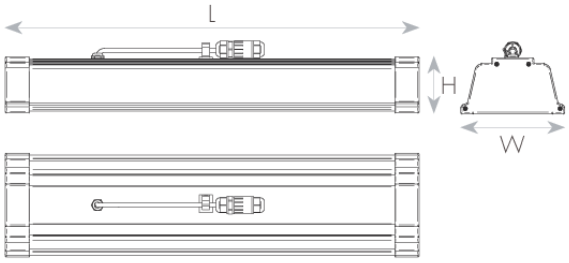



DIMENSIONS & WEIGHT

Width	150.6mm
Length	600mm
Height	81.7mm
Product weight	1550g

MATERIALS & COLORS

Cable surface [mm2]	white
Protection class IEC 62262	aluminum
Cover finishing	IK08
Cover material	milky
Lens material	PC

ELECTRICAL DATA

Nominal wattage	40W
Nominal current	0.18A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver output current	125mA
Power factor	>0.96
THDi	<16%
Output ripple current	≤3%
Inrush current	40A
Inrush current time T_{h50}	0.5µs
Max. no. of lum. On circuit break. B10 A	9
Max. no. of lum. On circuit break. B16 A	15
Max. no. of lum. On circuit break. C10 A	18
Max. no. of lum. On circuit break. C16 A	30
Dimmable mode	No

CERTIFICATES & STANDARDS

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	✓
TM21	√ Ta=35°C
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	✓
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4
מחירון דקל	88.082.0410

APPLICATION & MOUNTING

Ambient temperature range	-10...+40°C

PERFORMANCE

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>60000Hrs
Driver lifespan	50000Hrs

PHOTOMETRIC DATA

Luminous efficacy	129Lm/W
Luminous flux	5150Lm
CCT	5700K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	80°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >