
לינארי לבן TRACK 40W 80° IP65 אור קר




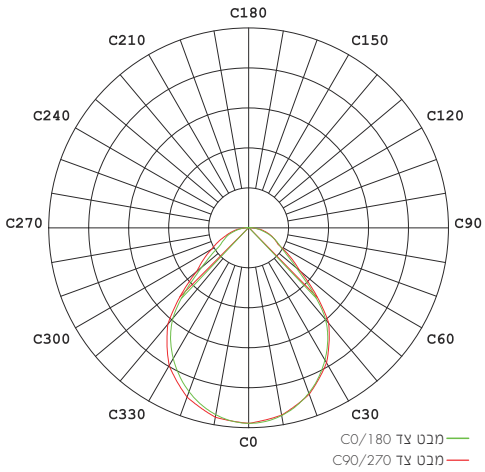

סדרת גופי תאורת לד לינאריים בדרגת אטימות IP65 וביעילות אורית גבוהה 125Lm/w. עדשה אופטית ועדשה אקרילית למניעת סנוור, התקנה קלה ופשוטה בעזרת קליפסים כצמוד תקרה או כגוף תלוי מתכוונן בגבהים של 3-12 מטר. אפשרות שרשור לגוף הבא תוך שמירה על אטימות. פתרון מתקדם עבור מפעלים, מחסנים, מעברים, חנויות, מבני ציבור ואולמות.

מק"ט - 74057140
דגם - HLE130-600
קישור לדף מוצר ואביזרים נלווים באתר

5 YEAR GUARANTEE | PRO | 220-240V 50-60Hz | IP65 | IK08 | מתאים לדרישות התקן הישראלי

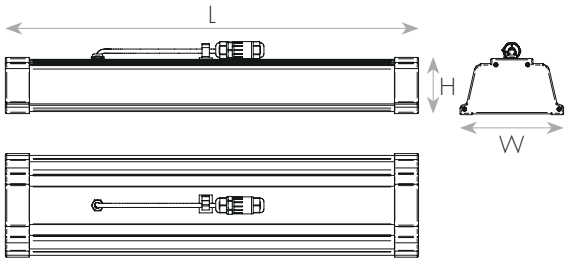



DIMENSIONS & WEIGHT	מידות ומשקל
Width	150.6mm
Length	600mm
Height	81.7mm
Product weight	1550g

MATERIALS & COLORS	מבנה וגימור
Product color	white
Body material	aluminum
Protection class IEC 62262	IK08
Cover finishing	milky
Cover material	PC

ELECTRICAL DATA נתונים חשמליים

Nominal wattage	40W
Nominal current	0.18A
Nominal voltage	220-240V
Mains frequency	50/60Hz
Protection class	Class 2
Operating mode	Internal LED driver
Driver output current	125mA
Power factor	>0.96
THDi	<16%
Output ripple current	≤3%
Inrush current	40A
Inrush current time T_{h50}	0.5µs
Max. no. of lum. On circuit break. B10 A	9
Max. no. of lum. On circuit break. B16 A	15
Max. no. of lum. On circuit break. C10 A	18
Max. no. of lum. On circuit break. C16 A	30
Dimmable mode	No

CERTIFICATES & STANDARDS תקנים

Nisko Class	PROFESSIONAL 5 Years
Israeli Standard	Ta=40°C IS 20-1 IS 20-2-1
CB	IEC 60598-1 IEC 60598-2-1 IEC 61347-1 IEC 61347-2-13 IEC 62031
Photobiological Safety	IEC 62778 RG0 (Exempt)
EMC	IEC 55015 IEC 61000-3-2 IEC 61000-3-3 IEC 61547
LM80	√
TM21	√ Ta=35°C
IP 60529	IP65
Protection class IK 62262 (shock resistance)	IK08
ISO 9001	√
אישורים נוספים	√ פיקוד העורף √ מבחן הרס ת"י 5103-4
מחירון דקל	88.082.0410

APPLICATION & MOUNTING יישומים

Application environment	Indoor Outdoor
Mounting type	Surface/Pendant
Mounting location	Ceiling
Type of protection	IP65
Ambient temperature range	-10...+40°C

PERFORMANCE ביצועים

Lifespan (Hr)	50000Hrs
TM21	√ Ta=35°C
Lifespan L70	>60000Hrs
Lifespan L80	>60000Hrs
Lifespan L90	>60000Hrs
Driver lifespan	50000Hrs

PHOTOMETRIC DATA אופטיקה

Luminous efficacy	129Lm/W
Luminous flux	5150Lm
CCT	5700K
CRI	>80
LED manufacturer	EVERLIGHT
Chip type	SMD 2835
Beam angle	80°
CIE class	Direct
Efficiency	100%

www.niskoelec.com < info@niskoelec.com < 072-2400-600 < קבוצת ניסקו בע"מ > המעיין 41, מודיעין >